

REVISÉ
VERSION*

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: G06F 9/46	A1	(11) International Publication Number: WO 98/02814 (43) International Publication Date: 22 January 1998 (22.01.98)
(21) International Application Number: PCT/US97/12336 (22) International Filing Date: 15 July 1997 (15.07.97) (30) Priority Data: 08/680,146 15 July 1996 (15.07.96) US (71) Applicant: NEXT SOFTWARE, INC. (US/US); 900 Chesapeake Drive, Redwood City, CA 94063 (US). (72) Inventors: MARCOS, Paul, 2077 Crist Drive, Los Altos, CA 94024 (US); THORUP, Kresten; 565 Willow Road #14, Menlo Park, CA 94025 (US). (74) Agents: AAKER, Mark et al.; Apple Computer, Inc.; Infinite Loop, MS: 38-PAT, Cupertino, CA 95014 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW); Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM); European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE); OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With a revised version of the international search report</i> (88) Date of publication of the revised version of the international search report: 9 April 1998 (09.04.98)	
(54) Title: METHOD AND APPARATUS FOR DYNAMICALLY BROKERING OBJECT MESSAGES AMONG OBJECT MODELS		
(57) Abstract <p>The present invention dynamically brokers object messages between object models. A mediating component provides a bridge between object models such that messages can be transmitted in either direction between object models. The mediating component can be resident on a client machine, a server machine, or both. The mediating component can be used as a bridge between two instances of the same object model running on different machines. Thus, network communication is made possible for objects of an object model that otherwise lacks a networking capability. The mediating component maps a client object to a server object through proxy objects and stub objects. The proxy object always responds affirmatively when queried by a client object whether a server object can execute a particular method. A client object's message is forwarded to a server object. The mediating component performs any necessary translation of arguments or format of the message. In addition, the mediating component translates a server object's response.</p>		

82

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 9/46		A1	(11) International Publication Number: WO 98/02814
			(43) International Publication Date: 22 January 1998 (22.01.98)
(21) International Application Number: PCT/US97/12336		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GL, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 15 July 1997 (15.07.97)			
(30) Priority Data: 08-880,146 15 July 1996 (15.07.96) US			
(71) Applicant: NEXT SOFTWARE, INC. [US:US]; 900 Chesapeake Drive, Redwood City, CA 94063 (US);		Published <i>With international search report.</i>	
(72) Inventors: MARCOS, Paul; 2077 Crist Drive, Los Altos, CA 94024 (US); THORUP, Kresten; 565 Willow Road #14, Menlo Park, CA 94025 (US);			
(74) Agents: AAKER, Mark et al.; Apple Computer, Inc., Infinite Loop, MS: 38-PAT, Cupertino, CA 95014 (US);			
(54) Title: METHOD AND APPARATUS FOR DYNAMICALLY BROKERING OBJECT MESSAGES AMONG OBJECT MODELS			
(57) Abstract			
<p>The present invention dynamically brokers object messages between object models. A mediating component provides a bridge between object models such that messages can be transmitted in either direction between object models. The mediating component can be resident on a client machine, a server machine, or both. The mediating component can be used as a bridge between two instances of the same object model running on different machines. Thus, network communication is made possible for objects of an object model that otherwise lacks a networking capability. The mediating component maps a client object to a server object through proxy objects and stub objects. The proxy object always responds affirmatively when queried by a client object whether a server object can execute a particular method. A client object's message is forwarded to a server object. The mediating component performs any necessary translation of arguments or format of the message. In addition, the mediating component translates a server object's response.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroun	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR DYNAMICALLY BROKERING OBJECT MESSAGES AMONG OBJECT MODELS

BACKGROUND OF THE INVENTION

5

1. FIELD OF THE INVENTION

This invention relates to dynamic brokering of messages between objects implemented using like or different object models.

2. BACKGROUND

10

Object-oriented programming is a method of creating computer programs by combining certain fundamental building blocks, and creating relationships among and between the building blocks. The building blocks in object-oriented programming systems are called "objects." An object is a programming unit that groups together a data structure (instance variables) and the operations (methods) that can use or affect that data. Thus, an object consists of data and one or more operations or procedures that can be performed on that data. The joining of data and operations into a unitary building block is called "encapsulation." In object-oriented programming, operations that can be performed on the data are referred to as "methods."

15

20

An object-oriented software application uses objects to define its data and the methods that operate on the data. An object communicates with another object via messages. For example, when one object needs to manipulate data that resides in another object or needs to execute computation methods in another object, it sends a message. The requesting object identifies the desired manipulation operation by specifying a method. The requesting object can further send arguments that can be used by the second object in performing the named method. The servicing object performs the method requested in the message. The data provided by the requesting object can be used to perform the requesting operation. In client/server terminology, the requesting object is called the client object and the servicing object is called the server object.

25

30

35

When the client and server objects are running in the same computer and operating system or in the same process or memory address space, the program or system can use its own mechanisms for messaging and object identification without regard for any other systems. The physical location of the objects is determined, known, and maintained by the single system. In a distributed environment, however, objects can reside on different systems and across networks, for example. Thus, in a distributed environment, a client

object may need the services of a server object that resides on a remote system. Not all object models provide for such remote requests. Also, the remote system may use an object messaging mechanism that is incompatible with the client object's messaging mechanism. In that case, the client object and server
5 object cannot communicate or "interoperate".

An object model provides a mechanism for communication, or messaging, between objects within the model. The mechanism includes a protocol that defines the method of communication. Examples of object models include the NeXT object model, Microsoft's Object Linking and
10 Embedding/Common Object Model (OLE/COM), SunSoft's Distributed Object Environment (DOE), and Smalltalk. To facilitate communication, an object model can use an object bus, or an Object Request Broker (ORB). An ORB allows objects to make requests of, and receive responses from, other objects. Examples of ORBs include CORBA (defined by Object Management Group),
15 SOM from IBM, ORB Plus from HP, ObjectBroker from Digital Equipment Corporation, and Orbix from Iona.

An ORB uses an Interface Definition Language (IDL) to define static interfaces between objects. For example, an interface defines the methods and properties, or arguments, for each object. An interface file written in IDL is
20 compiled to generate client and server language-specific stubs such as C, C++, Objective-C, etc. These stubs must be compiled into both the client and the server before any communication can take place.

These language-specific stubs define how clients invoke corresponding services on the servers. From a client's perspective, the stub acts like a local
25 call. The stub is a local proxy for the remote server object. The stub includes code to encode and decode an operation and its parameters into a compacted message format that can be sent to the server. This is referred to as marshaling. Several ORBs, including the CORBA ORB, are described in detail in R. Orfali et al., "The Essential Distributed Objects Survival Guide" (New
30 York: John Wiley & Sons, 1996).

In addition to the language-specific stubs, CORBA provides some application program interfaces (APIs) on the client-side to facilitate object communication. A Dynamic Invocation Interface provides APIs that can be used to look up the metadata that defines the server interface, generate
35 message parameters, issue a remote call, and receive results from the call. An Interface Repository is a run-time database that contains machine-readable versions of the IDL-defined interfaces. The APIs associated with the Interface Repository provide mechanisms for retrieving, storing and updating the

metadata information contained in the Interface Repository. The ORB Interface includes APIs to convert an object reference (i.e., a unique name or identifier associated with an object) to a string.

5 Like the client side, the server side includes IDL stubs, or server stubs. A server stub is also referred to as a skeleton. Like a client stub, a server stub is defined using IDL and created using an IDL compiler. A server stub provides a static interface to a service provided, or exported, by a server. It calls the method on the server identified by the client. On the server side, CORBA provides functionality to aid in servicing a request.

10 A Dynamic Skeleton Interface provides a run-time binding mechanism to handle incoming method calls directed to a server that does not have a server stub. An object adapter provides the run-time environment for instantiating a server object, assigning an object reference to a server object, and passing it a request. An Implementation Repository is a run-time
15 repository that identifies the classes a server supports, the objects that are instantiated, and the instantiated objects' object references. Administrative data such as trace information can also be stored in the Implementation Repository. The server side includes an ORB Interface that is the same as that used on the client side

20 Existing object models such as the ones identified above do not provide a means for dynamic communication across object models. Thus, an OLE object cannot automatically and dynamically communicate with an object in the DOE object model. When a programmer is preparing an application program that must communicate across object models, the programmer must
25 identify the destination objects to the ORB by declaring and defining them in an IDL method file. The IDL method file is then compiled in conjunction with run-time libraries of each object model, producing separate executable files for the client and server. This process must be repeated when a method or property of an object changes or when the application program is modified to
30 reference new objects in a foreign or incompatible object model, for example. Thus, the ORBs only provide a static means for communicating across object models. The ORB is not capable of dynamically passing a message from one object model to an incompatible object model without prior knowledge of the method.

35 In OLE Automation, a subset of the OLE/COM object model from Microsoft Corporation (MS), a set of object definitions (or ODL) is compiled to create a type library or repository of object descriptions (e.g., objects and their methods and properties). Before invoking a method in an object, an

OLE/Automation client object queries the library, or the library itself, to determine whether a server object can process the desired method. To do this, the object invokes the GetIDsOfNames method on the server object to determine whether the desired method is a valid method of the server object.

5 The GetIDsOfNames method converts text names of properties and methods into a corresponding set of dispatch identifiers (dispIDs). A dispID uniquely identifies a method or argument. It is assigned to a method or argument in an object description file that is compiled before run-time. Thus, if a method or property is added, a new dispID must be generated and compiled
10 into the server.

If the response from the GetIDsOfNames method returns a dispID for the desired method, the client object invokes the method on the server object using the dispID to identify the method. If it is not a valid method, the client object must handle the error. If the method exists, but an error is raised during
15 processing, the client object must handle a different error. This is awkward because it requires the application programmer to write code to handle at least two types of error messages.

Further, this process requires the client object to send two messages. When the client and server objects do not reside on the same machine, the
20 messages must be sent across a network between the client and server objects to invoke a single method. This increases the network's message load, which is undesirable.

SUMMARY OF THE INVENTION

25 The present invention dynamically brokers object messages between objects implemented using object models. An mediating component provides a bridge between objects in these object models such that messages can be transmitted in either direction between object models. The mediating component can be resident on a client machine, a server machine, or both,
30 depending on the type of communication being done. The mediating component can be used as a bridge between two instances of the same object model running on different machines. Thus, a networked version is created for an object model that otherwise lacks a networking capability.

The mediating component intercepts messages sent by a client object to
35 the server object. That is, messages sent by a client object are sent to the server object via the mediating component. However, the client believes that the messages are being sent directly to the server object. The mediating component creates a mapping between a client object and a server object.

Mapping information is determined by the mediating component when a client object requests a connection to the server object.

When a client requests a connection to a server object, the mediating component determines whether the server object is available on the server machine. If the server object is available, the mediating component returns a proxy (e.g., returns pointer to or identifier for the proxy object) for the server object to the client object. If the proxy object does not already exist, the mediating component creates the proxy object.

If the stub object associated with the server object does not exist, it is created by the mediating component. The mediating component creates a mapping between the proxy object returned to the client object, the server object's stub object and the server object. The mapping information can be stored in one or more tables, for example. A table look up mechanism can be used to retrieve the mapping information.

The mapping information can be used to satisfy a future connection request. When a connection request is made for a server object, the mediating component queries the mapping information to determine whether a mapping already exists for the requested server object. If a mapping does exist, the identity of the proxy object is returned to the client object.

The client object uses the connection to send a message to the server object. A client object's message is forwarded to a server object via the proxy and stub objects. The mediating component performs any necessary message translation. In addition, the mediating component translates a server object's response.

The client object's message is generated using the message protocol of the client object's object model. The client object's message is translated into the message protocol of the server object's object model. For example, the proxy object determines the expected method identification and the number and type of arguments for the server object.

The proxy object builds a method invocation for the server object using the client object's message and the information expected by the server object. For example, the proxy object translates a method identification in the client object's message to one expected by the server object. In addition, the proxy object can translate the arguments such that the types of arguments provided in the client object's message are the same as the expected types. For example, a string argument can be translated into an object argument.

A translated message is forwarded to the server object on the server machine via the proxy and stub objects mapped to the server object by the

mediating component. The proxy object forwards the translated message to the stub object. The stub object forwards the translated message to the server object. The server object processes the message. A response is forwarded to the proxy object via the stub object. The proxy object translates the response
5 message using the client object's message protocol. In addition, the proxy object can translate the response such that the response type is that expected by the client object. The message is forwarded to the client object.

The mediating component delays the creation of a server machine stack until it is determined that a method is callable on the server machine. A
10 message is forwarded to the server object via a plurality of intervening objects such as the proxy and stub objects on the server machine. The invention waits until the message is received by the last intervening object (e.g., the server object's stub object) before the message is unraveled. Otherwise, each intervening object would retrieve the method and arguments from the
15 message, push the arguments on a stack, attempt to invoke the method, fault, rebuild the message, and forward the message to another object. The invention optimizes the message transmission by eliminating the need to unravel the message at each intervening point.

The mediating component can be resident on the client, server, or both.
20 The mediating component can act as a bridge between compatible or incompatible object models.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 provides an example of a general purpose computer to be used
25 in accordance with embodiments of the present invention.

Figure 2 provides a block diagram giving an overview of embodiments of the present invention.

Figures 3A-3C provide configuration examples according to embodiments of the present invention.

30 Figures 4A-4C provide a process flow according to an embodiment of the present invention for brokering object messages using a bridge on the server machine.

Figures 5A-5C provide a process flow according to an embodiment of the present invention for brokering object messages using a bridge on the client
35 machine.

Figures 6A-6C provide a process flow according to an embodiment of the present invention for brokering object messages using a bridge on both the client and server machines.

Figure 7A provides an example of a process flow for translating argument types from the NEXTSTEP/OPENSTEP environment to the Windows environment according to an embodiment of the invention.

Figure 7B provides an example of a process flow for translating
5 argument types from the Windows environment to the
NEXTSTEP/OPENSTEP environment according to an embodiment of the
invention.

Figures 8A-8B provide an example of a process flow for establishing a
connection and generating a mapping between client and server objects
10 according to an embodiment of the invention.

Figure 9 provides an example of a delayed stack creation process flow
according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

15 A method and apparatus for dynamically brokering object messages
among object models is described. In the following description, numerous
specific details are set forth to provide a more thorough description of the
present invention. It will be apparent, however, to one skilled in the art, that
the present invention may be practiced without these specific details. In other
20 instances, well-known features have not been described in detail so as not to
obscure the invention.

The present invention can be implemented on a general purpose
computer such as illustrated in Figure 1. A keyboard 110 and mouse 111 are
coupled to a bi-directional system bus 118. The keyboard and mouse are for
25 introducing user input to the computer system and communicating that user
input to CPU 113. The computer system of Figure 1 also includes a video
memory 114, main memory 115 and mass storage 112, all coupled to
bi-directional system bus 118 along with keyboard 110, mouse 111 and CPU 113.
The mass storage 112 may include both fixed and removable media, such as
30 magnetic, optical or magnetic optical storage systems or any other available
mass storage technology. Bus 118 may contain, for example, 32 address lines for
addressing video memory 114 or main memory 115. The system bus 118 also
includes, for example, a 32-bit DATA bus for transferring DATA between and
among the components, such as CPU 113, main memory 115, video memory
35 114 and mass storage 112. Alternatively, multiplex DATA/address lines may
be used in place of separate DATA and address lines.

In the preferred embodiment of this invention, the CPU 113 is a 32-bit
microprocessor manufactured by Motorola, such as the 680X0 or PowerPC

processor or a microprocessor manufactured by Intel, such as the 80X86 or Pentium processor. However, any other suitable microprocessor or microcomputer may be utilized. Main memory 115 is comprised of dynamic random access memory (DRAM). About 32 megabytes of DRAM preferred.

5 Video memory 114 is a dual-ported video random access memory. One port of the video memory 114 is coupled to video amplifier 116. The video amplifier 116 is used to drive the cathode ray tube (CRT) raster monitor 117. Video amplifier 116 is well known in the art and may be implemented by any suitable means. This circuitry converts pixel DATA stored in video memory 114 to a

10 raster signal suitable for use by monitor 117. Monitor 117 is a type of monitor suitable for displaying graphic images.

The computer system described above is for purposes of example only. The present invention may be implemented in any type of computer system or programming or processing environment. When a general purpose computer

15 system such as the one described executes the processes and process flows described herein, it is configured to dynamically broker object messages among object models.

Figure 2 provides a block diagram overview of an embodiment of the present invention. Mediating component 204 provides a bridge between

20 objects implemented using object models. For example, mediating component 204 provides a bridge between system A 202 (which uses object model A) and system B 206 (which uses object model B).

Systems A and B (202 and 206, respectively) provide a platform in which object models A and B operate. Systems A and B each may be a machine,

25 process, client, or server. System A 202 can include operating system software such as the NEXTSTEP, or OPENSTEP framework that executes in the Mach operating system. System B is the Windows environment running in the DOS operating system, for example.

Object model A can be a different object model than object model B. For

30 example, object model A may be NeXT Software, Inc.'s Distributed Object (DO) model and object model B may be Microsoft, Inc.'s Object Linking and Embedding/Component Object Model (OLE/COM).

Alternatively, object model A can be the same object model as object model B. In this case, mediating component 204 can act as a bridge in a

35 network environment such that an object in an object model can be distributed across different machines. That is, the bridging capability of the present invention can be used to create a network version of an object model. The present invention can be used to allow a server object residing in OLE/COM

on a first machine to service a message generated by a client object that resides in OLE/COM on a second machine.

Mediating component 204 provides a dynamic bridge between objects implemented using object models. Using the present invention, there is no
5 need to define a static interface between objects and their object models. Mediating component 204 brokers a message by determining the interface requirements as each request arises during run-time. Thus, there is no need to generate and create a static messaging interface to define the communication between a client object and a server object. There is no need to write, compile
10 and link IDLs each time that a new object class is added to an application. Mediating component 204 locates the server object to process the client's message. Mediating component 204 identifies the expected method specification and arguments for the server. Mediating component 204 translates the client's message using information obtained about the server
15 object.

The message is sent by mediating component 204 to the server object. Mediating component 204 uses a distributed object model or protocol to forward the message to the server object. The distributed object model is preferably NeXT's DO. However, other distributed object models (e.g., CORBA
20 or Microsoft's Network OLE or Distributed COM) can be used.

Thus, for example, when a connection request is received in System A, mediating component 204 determines whether a server object in System B can service the message. For example, mediating component 204 queries
25 information available in object model B to determine whether a server object exists in that system and created in that model that can process the message using the arguments supplied by the client object. If a server object exists, mediating component 204 determines the method specification and the number and type of arguments expected by the server object. If necessary, mediating component 204 returns a proxy object to the requester. When a
30 message is directed to the server object via the proxy object, mediating component 204 performs a mapping, or translation, of arguments for use by the server object. Mediating component 204 then immediately translates the message such that it can be understood by the server object, and forwards the translated information to the server object. In this way, the mediating
35 component 204 carries out dynamic translation at run-time.

Mediating component 204 provides a set of mappings between objects and object models. When a reference is made by a client object for a server object, mediating component 204 manages a reference by a client object to a

server object. In addition, if the server is a part of a network, mediating component 204 locates the server object by querying each of the plurality of servers running on the network. A reference to the server object is managed by mediating component 204. Thus, mediating component 204 provides a mapping between objects implemented using like or different object models. For example, mediating component 204 creates a proxy object and a stub object. The proxy object maintains a reference to the client object. The stub object maintains the reference to the server object. Mediating component 204 maps an association between a proxy object and the stub object. If the server object is found, the server object's calling format is returned to mediating component 204. Mediating component 204 uses the calling format information to translate the client object's message for use by the server object.

Mediating component 204 can reside on either the client or the server and can run in a process (i.e., a discrete address space) or in a single-process machine. Preferably, mediating component 204 resides on a computer that is running a windowing environment such as Microsoft Windows. That is, mediating component 204 can function with any operating environment having the ability to send and receive messages. Further, the functionality of mediating component 204 described with reference to objects can be implemented in an environment other than an object-oriented environment.

Object messages can be sent in either direction between client and server. Thus, for example, an object message that originates in an object implemented using object model B in System B (System 206) is transmitted to and processed by a server object implemented using object model A in System A (System 202). A response can be sent between the server object in System A and the client object in System B (System 206). Similarly, a client object implemented using object model A in System A (System 202) generates a message that is sent to a server object implemented using object model B in System B (System 206). A response that is generated by the server object in System B is transmitted to the client object in System A.

Figures 3A-3C provide configurations for exemplary embodiments of the present invention. Referring to Figure 3A, mediating component 204 resides on server machine 304. Server machine 304 is running, for example, a Visual C++ application program under Microsoft Windows and using OLE/COM as Object Model B. A client machine 302 is running, for example, an Objective-C application program using Object Model A in NeXT's NEXTSTEP 3.3 environment or OPENSTEP 4.0 for Windows NT using NeXT's D'OLE™ Distributed OLE software, Distributed Object (DO), or Portable

Distributed Objects (PDO) object models. Client object 306 is implemented using Object Model A on client machine 302. Client object 306 transmits a message directed to server object 308. Server object 308 is implemented using Object Model B on server machine 304. Machines 302 and 304 may also be
5 processes rather than physical machines.

The message generated by client object 306 is directed to server object 308 on server machine 304 (i.e., a remote object with respect to client object 306). A mechanism is used by client machine 302 to forward the message to the remote object's machine (e.g., server 304). The forwarding mechanism is, for example,
10 that used in NeXT Software Inc.'s DO system or the technology disclosed in United States Patent No. 5,481,721 entitled Method for Providing Automatic and Dynamic Translation of Object Oriented Programming Language-Based Message Passing into Operation System Message Passing Using Proxy Objects and assigned to NeXT Software, Inc. In NeXT's DO, a proxy object 310 is used
15 to represent the remote object (e.g., server object 308). By using proxy object 310, client object 306 does not need to obtain the actual location of server object 308. Client object 306 sends a message directed to server object 308 via proxy object 310 and connection 348. Proxy object 310 forwards the message to proxy object 314 on server 304 via transport layer 318. That is, proxy object sends the
20 message to transport layer 318 via connection 346. Transport layer 318 sends the message to proxy object 314 via connection 344. Transport layer 318 uses a mechanism for transporting the message to a remote machine such as, for example, Transmission Control Protocol/Internet Protocol (TCP/IP). Remote Procedure Calls, such as the RPC facilities of MS Windows NT, is another
25 example of a mechanism that can be used to forward a message to a remote machine.

ORB 312 runs on server machine 304. ORB 312 acts as a control module that receives a message initiated by a client and creates a dynamic mapping between the client and a server to enable transmission of messages. During
30 execution, ORB 312 is capable of creating a dynamic messaging interface between two objects or processes using separate object models.

When it is invoked, ORB 312 vends itself on the network. That is, ORB 312 registers on the network using a name or identifier. Other objects on the network can locate ORB 312 using its registered name. Client object 306
35 connects to ORB 312 via its well known (or registered) name. Figures 8A-8B provide an example of a process flow for establishing a connection and generating a mapping between a client and server object according to an embodiment of the invention.

At step 802, client object 306 connects to ORB 312 via its well known name. Client object 306 requests a connection to server object 308 at step 804. At step 806 (i.e., "server object exists?"), ORB 312 determines whether server object 308 is available on server machine 304. To identify a server object, for example, ORB 312 communicates with an interface repository or object database for each object model that resides on server machine 304 to locate server object 308. (Under MS OLE/COM, the object database is termed a COM server and is implemented as a .DLL or .EXE file.) If server object 308 does not exist, ORB 312 can notify client object 306 at step 808; and processing ends for the current request at step 826.

If ORB 312 determines (at step 806) that server object 308 does exist, processing continues at step 810 to examine mapping information for server object 308. ORB 312 stores mapping information from previous connections. The mapping information can be stored in one or more tables, for example. The mapping information includes an association between a proxy object and its related server object and the server object's stub object. For example, a mapping table entry for server object 308 contains a pointer to server object 308, stub object 316 and proxy object 314. At step 810, ORB 312 examines the mapping information to determine whether a mapping entry exists for server object 308.

At step 812 (i.e., "mapping exists?"), if a mapping entry exists for server object 308, processing continues at step 814 to retrieve the pointer to the proxy object associated with server object 308 (e.g., proxy object 314 in Figure 3A). If it is determined (at step 812) that there is no mapping information for server object 308, processing continues at step 816 to create a proxy object for server object 308 (e.g., proxy object 314).

At step 818 (i.e., "stub object exists?"), ORB 312 makes a determination whether stub object 316 exists for server object 308. If it does not exist, processing continues at step 820 to create stub object 316 and processing continues at step 822. If it does exist, processing continues at step 822. At step 822, ORB 312 creates an entry in the mapping table that identifies server object 308, proxy object 314, and server object 316. At step 824, ORB 312 returns proxy object 314 to client object 306. Processing ends for the connection request at step 826.

Thus, when a connection request is received from client object 306, ORB 312 establishes a connection between client object 306 and server object 308. The connection between client object 306 and server object 308 is formed via proxy object 314 and stub object 316. Client object 306 can then send a message

to server object 308 using the connection. When a request (e.g., a message from client object 306 to execute a method of an object created under the Microsoft Excel application program running in OLE/COM on server machine 304) is transmitted to server machine 304, ORB 312 intercepts the message. The connection established between client object 306 and server object 308 by ORB 312 is used to transmit the message to server object 308. A response generated by server object 308 is sent to client object 306 via the same connection.

As illustrated in Figure 3A, the connection can be indirect and consist of multiple components and connections. Client object 306 is connected to proxy object 310 via connection 348. Connection 346 forms a connection between proxy object 310 and transport layer 318. The message is sent by transport layer 318 to server machine 304 and received by proxy object 314 via connection 344. Proxy object sends the message to server stub 316 via 342. Stub object 316 sends the message to server object 308 via connection 340.

Proxy object 314 and stub object 316 handle the message received from client object 306. For example, proxy object 314 receives a DO message sent by client object 306 via proxy object 310 and transport layer 318. Proxy object 314 forwards the message to stub object 316. Stub object 316 translates the message and its arguments so that the arguments can be understood by server object 308 (e.g., an object created with Microsoft's Excel running in the OLE/COM object model). For example, stub object 316 translates the message's operation into an operation identifier that is expected by server object 308. In addition, one or all of the message's arguments can be translated for server object 308. For example, if the server object is expecting an object as one of its arguments, stub object 316 can translate an argument contained in the message sent by client object 306 into this expected object.

Stub object 316 forwards the message to server object 308. Server object 308 processes the message (e.g., it executes a requested message) and returns a response to stub object 316. Stub object 316 performs argument translation for the response. The response is received by stub object 316 and forwarded to proxy object 314. Proxy object 314 translates the response using the protocol of object model A (the protocol of client object 306) and packages the response for transmittal across transport layer 318. The response is transmitted to proxy object 310 via transport layer 318. Proxy object 310 forwards the response to client object 306.

In Figure 3A, mediating component 204 resides on the server machine. Alternatively, mediating component 204 can reside on the client machine. Figure 3B provides a configuration example wherein mediating component

204 is resident on the client machine. The client machine 322 is using the OLE/COM object model under Microsoft Windows, for example.

As described above, ORB 312 of mediating component 204 vends itself on the network. When a request is made, ORB 312 creates the proxy and/or
5 stub object, if they don't already exist. In addition, ORB 312 monitors and intercepts messages. A connection can be established between client object 308 and server object 306 using the process flow exemplified in Figures 8A-8B, for example. When client object 308 transmits a request to server object 306, ORB 312 intercepts the message.

10 As in Figure 3A, the connection between the client and server objects uses one or more connections and components. Client object 308 is connection to server object 306 via proxy object 314, stub object 316, transport layer 318 and proxy object 310 using connections 352, 342, 350, 346, and 348.

In some instances, a client object may query whether a server object can
15 respond to a request before the client object actually sends the request. In this case, mediating component 204 responds in the affirmative. That is, if client object 308 sends a query message initially, mediating component 204 responds by indicating that it is able to respond to the request. In so doing, mediating component 204 can eliminate the need to send the initial message across to the
20 server and wait for a response. It is only necessary to transmit the request to the server. When client object 308 receives the affirmative response, it packages its request and arguments into a message using the protocol specified for object model B. Client object 308 sends the message to proxy object 314.

When the message is received, the proxy object 314 translates the
25 message using the protocol specified by object model A. Proxy object 314 forwards the message to stub object 316. For example, proxy object 314 attempts to invoke the message and is also unable to perform the requested operation. As a result, proxy object 314 faults and forwards the message to stub object 316. Stub object 316 translates the arguments, if necessary, to correspond to the type
30 of arguments expected by server object 306. Stub object 316 is unable to service the request. Stub object 316 packages the message for transmittal over transport layer 318 to proxy object 310 on server machine 324.

Upon receipt, proxy object 310 discards the transport layer packaging, and forwards the message to server object 306. Server object 306 services the
35 request and returns its response using the messaging protocol of Object Model A. Server object 306 sends the message to proxy object 310. Proxy object 310 packages the response for transmittal across transport layer 318 to client machine 322. The response is received from transport layer 318 by stub object

316. Stub object 316 strips the transport layer packaging off the response. Using the mapping retained by ORB 312, the response is returned from stub object 316 to proxy object 314. Proxy object 314 translates the response using the messaging protocol of Object Model B. The return value is returned by proxy object 314 to client object 308.

The previous configuration examples in Figures 3A and 3B use an mediating component 204 on either the client or server machine. It is also possible for mediating component 204 to reside on both the client and server machines. Figure 3C provides a configuration example wherein both the client and server machines include an mediating component.

The connection between the client object 308C and server object 306S is formed indirectly using multiple connections and components. Client object 308C connected to proxy object 314C via connection 370. Proxy object 314C is connected to stub object 316C via connection 368. Stub object 316C is connected to transport layer 318 via connection 366. Transport layer is connected via connection 364 to proxy object 314S. Proxy object 314S is connected to stub object 316S via connection 362. Stub object 316S is connected via connection 360 to server object 306S.

Referring to Figure 3C, client machine 332 and server machine 334 are both using Object Model B. However, Object Model B on client machine 332 does not have the ability to forward a message to Object Model B on server machine 334, and vice versa. That is, Object Model B does not have distributed object capability; it can not forward messages between objects that reside on different machines.

Using the configuration illustrated in Figure 3C, for example, the present invention can be used to act as a bridge between instances of the same object model that reside on different machines. Thus, a non-distributed, non-networked object model can become a distributed, networked object model using the present invention.

Referring to Figure 3C, client and server machines 332 and 334 are running Microsoft's Windows NT operating system which uses non-distributed OLE/COM, for example. The communication protocol used between mediating components 204C and 204S is a distributed object model such as NeXT's DO, for example. Client object 308C is executing on client machine 332. Server object 306S is executing on server machine 334. ORB 312C creates and manages proxy object 314C and stub object 316C. Similarly, ORB 312S creates and manages proxy object 314S and stub object 316S.

Client object 308C can forward a request to server object 306S via mediating components 204C and 204S. Client object 308C sends an initial query to determine whether its request can be processed. ORB 312C intercepts the message. ORB 312C responds to the query by stating that it can service the request. When the affirmative response is received by client object 308C, it packages its request and any arguments using Object Model B's messaging format.

Client object 308C sends the message which is intercepted by ORB 312C and processed by proxy object 314C. Since the message is intended for a server object in a like object model (i.e., server object 306S running in Object Model B), there is no need for proxy object 314C to translate the message into the server object's object model. However, it may be necessary to translate the arguments to accommodate the argument expectations of server object 306S as described above. Argument translation can be performed by mediating component 204C or 204S.

Proxy object 314C forwards the message to stub object 316C. Stub object 316C packages the message for transmittal to server machine 334 via transport layer 318. The message is intercepted by ORB 204S on server machine 334. Proxy object 314S strips off the transport layer packaging and forwards the message to stub object 316S. Stub object 316S forwards the message to server object 306S.

Server object 306S processes the message and forwards a response to stub object 316S. The message is forwarded to client object 308C via proxy object 314S, transport layer 318, stub object 316C and proxy object 314C. Argument translation can be performed on either client machine 332 by mediating component 204C or on the server machine 334 by mediating component 204S.

Thus, as described above, the mediating component of the present invention acts as a bridge between objects implemented using like or different object models. An mediating component can act as a bridge between two objects implemented using two instances of the same object model running on different machines. The invention enables the distribution of objects such as OLE Automation objects. An mediating component can reside on either the server machine, the client machine, or both.

Server-Side Bridge

The bridging capabilities of the present invention can be implemented on the server machine. In one example, the server machine is running MS Excel software under the MS Windows operating system. The server machine is using the non-distributed OLE/COM object model. The bridging capabilities

can be implemented as an executable file (.EXE) or dynamic link library (.DLL) in the Windows environment, for example. A client object executing on a client machine generates a request for processing by the MS Excel instance running on the server machine. The client machine is running NEXTSTEP or
5 OPENSTEP using NeXT's DO object model with D'OLE or PDO. Figures 4A-4C provide a process flow for brokering object messages between NeXT's object model on a client machine and the OLE/COM on a server machine.

Referring to Figures 4A-4C, the client establishes a connection with the client proxy on the client machine at step 402. The connection can occur as a
10 consequence of some user action, or on startup, for example. At step 404, the client sends a message directed to a remote server.

At step 406, the client proxy intercepts the message. Because the client proxy is unable to respond to the message, it enters a fault state. As a result of the fault state, the client proxy packages the message and forwards it via a
15 transport layer to the server proxy object at step 408. At step 410, the server proxy object receives the message and strips off the transport layer packaging.

At step 412, the server proxy object sends the message to the stub object. The server stub attempts to perform the operation specified in the message and enters a fault state at step 414. At step 416, the server stub object queries the
20 server object model for method and argument information of a server object.

At step 418 (i.e., "can server object respond to message?"), the server stub object determines whether the server object to which the message is directed is capable of responding to the message. For example, the server stub object invokes a GetIDsOfNames routine to determine whether the specified method
25 is a valid method of the server object. The GetIDsOfNames method converts text names of properties and methods into a corresponding set of dispIDs that uniquely identify a method and arguments. If the method or arguments are invalid (e.g., there is no dispID for a specified method or argument), the server stub object raises an error response at step 420 and processing continues at step
30 428 to forward the response to the client object.

If it is determined that the server object can respond (i.e., the test of step 418 is affirmative), processing continues at step 422 to translate the arguments for the receiving object model (i.e., the server object's object model). For example, an OLE/COM data structure is created and the arguments are stored
35 in the data structure. In addition, the server stub object can convert an argument from its original type to one expected by the server object. For example, if the server object expects an object as an argument but the client specified a non-object value, the server stub converts the argument to an

object. Similarly, a numeric argument can be converted to a string, for example.

At step 424, the client object's message is invoked on the server object. For example, to invoke a method using an object in the OLE/COM object model, the *Invoke* method is called on the COM server object specifying the
5 DispID as an argument. The arguments are retrieved from the OLE/COM data structure. The method is identified by specifying the method's identifier (DispID).

At step 426, the server stub waits for a response generated from the
10 method invoked in the server object. At step 428, the server stub translates the response. The response can be a response received from the method processing, or from an error condition raised during processing, for example. The response is packaged and transmitted across the transport layer to the proxy object on the client machine at step 430. At step 432, the message is
15 unpackaged by the client proxy object and returned to the client object. Processing ends at step 434.

Client-Side Bridge

The bridging capabilities of the present invention can be implemented on the client machine. In one example, the client machine is running MS
20 Word in the Windows environment. The client machine is using the OLE/COM object model. An object created (instantiated) by MS Word generates a message request to print a document on a PostScript printer on a server machine. The server machine is running NEXTSTEP or OPENSTEP using NeXT's DO object model with D'OLE or PDO. Figures 5A-5C provide a
25 process flow for brokering object messages between the OLE/COM object model on a client machine and NeXT's object model on a server machine.

At step 502, the ORB creates the proxy object on the client machine. The ORB can create the proxy object as a result of a request from a client object, for example. At step 504, the client object queries the proxy object to determine
30 whether it can process the client object's request. As previously described, the OLE Automation mechanism uses a two message approach. A first message from the client object queries the server object for a dispID. That is, the client object sends a *GetIDsOfNames* to identify the dispID of the method. In the prior art, the server object responds by either sending a dispID (if the method
35 identified by the sender is valid), or by sending an error (if an invalid method is specified by the client object). If a dispID is returned, the client object sends a second message to server object using the dispID of the method.

In addition to the messaging load on the network, this approach requires that the communication between a client and server be permitted only after a method is identified. Thus, if the client object wishes to invoke another method on the server object, it must use the two message approach to
5 identify a new dispID. Further, if a new method is added by the server object, a new proxy and stub implementation must be established between the client and server objects.

In contrast, the invention uses a technique that allows a client object to send a message of which the server object has no knowledge. The server object
10 can add new methods without any change being made on the client side. When the client object sends a GetIDsOfNames message to obtain the dispID for a method of the server object, the invention dynamically creates a unique ID for the requested method, if one doesn't already exist. The invention uses this ID to respond to the client object's first message. The response includes
15 the unique ID. In so doing, the invention indicates that a server object is able to perform the desired method (i.e., the invention responds affirmatively to the client object's first message). This unique ID is retained along with the name of the requested method. The unique ID is used to invoke to query the server for the requested method when the client object sends a second,
20 invocation message.

Thus, when the proxy object receives the message sent by the client object in step 506, it returns an affirmative response that indicates that the client object's request can be processed. The response includes the unique ID to identify the method which the ORB retains to identify the message when the
25 client invokes it. The client object creates a message (e.g., operation specification and arguments) that includes the tag using the OLE/COM message protocol at step 508. At step 510, the proxy object translates the client object's message for use on the server machine's object model (e.g., NeXT DO).

At step 512, the message is invoked on the proxy object previously set up
30 by the ORB. The proxy object is unable to perform the specified operation and faults at step 514. At step 516, the proxy object forwards the message to the stub object. The stub object attempts to perform the message's operation and faults at step 518. At step 520, the stub object packages the message and forwards the message via the transport layer to the server machine.

35 The proxy object receives the message and strips off the transport layer's message packaging at step 522. The server proxy object forwards the message to the server object at step 524. The server proxy object waits for a response from the server object at step 526. At step 528, the response sent by the server object

is translated for transmittal via the transport layer by the server's proxy object. The message is transmitted via the transport layer to the client's stub object at step 530. At step 532, the stub object strips off the transport layer packaging and forwards the message to the client machine's proxy object. At step 534, the
5 proxy object translates the message using the client object's object model and returns the response to the client object. Processing ends at step 536.

Client and Server Bridge

The bridging capabilities of the present invention can be implemented on both the client and server machines. Using the present invention, a
10 non-networked object model (e.g., OLE/COM) can communicate across machines. In one example, both the server and client machines are running the MS Windows environment and using the OLE/COM object model. A client object created (instantiated) by MS Excel on the client machine generates a request message for processing by an object instantiated by the MS Word
15 application program running on the server machine. Using the present invention, the Excel object can send a message to the MS Word object on another machine. Figures 6A-6C provide a process flow for brokering object messages between OLE Automation objects running on different machines.

At step 602, ORBs on the server and client machines are created. Client
20 and server proxies are established by the ORBs. The ORBs monitor for messages and intercept messages from a client object to a server object. Steps 604 and 606 correspond to steps 504 and 506 of Figure 5A. At step 604, the client object queries the proxy object (e.g., GetIDsOfNames) to determine whether it can process the client object's request. The proxy object responds in the
25 affirmative and includes a unique ID for the method at step 606. In so doing, the invention provides a mechanism that allows a client object to send a message to a server object that the server object is previously unaware. The server object can add new methods without any change being made to the client object. As far as the client object is concerned, the unique ID sent by the
30 proxy object is the dispID of the actual method in the server object.

The client object creates a message (e.g., operation specification and arguments) including the tag and using the OLE/COM message protocol at step 608. At step 610, the proxy object translates the client object's message. There is no need to translate the message from one object model protocol to another
35 since both client and server objects are using the same object model. However, the proxy object can translate arguments into the types that are expected by the server object, if that is required.

At step 612, the message is invoked on the proxy object. The proxy object is unable to perform the specified operation and faults at step 614. At step 616, the proxy object forwards the message to the stub object. The stub object attempts to perform the message's operation and faults at step 618. At step 620, the stub object packages the message and forwards the message via the transport layer to the server machine.

The message is received by the proxy object on the server machine and strips off the transport layer's message packaging at step 622. The server proxy object forwards the message to the stub object which in turn forwards the message to the server object at step 624. The server proxy object waits for a response from the server object at step 626. At step 628, the stub object forwards the response to the proxy object. The proxy object packages the response and forwards it to the client machine via the transport layer at step 630. At step 632, the stub object strips off the transport layer packaging and returns the response to the client machine's proxy object. At step 634, the proxy object translates the response (e.g., returns a value translation) and returns the response to the client object. Processing ends at step 636.

Argument Translation

The invention allows an object to communicate with another object regardless of the object models used to implement the objects. A message sent by an object implemented using one object model can contain arguments that are used by another object that is implemented using a second object model. Each argument has a type (e.g., numeric, string, and object). The argument types used by the sending object may be incompatible with those used by the receiving object. The invention provides a mechanism to translate these incompatible argument types.

In the NEXTSTEP or OPENSTEP environment, arguments can be passed as a value or an object, for example. Examples of the types associated with a value are short, long, integer, and float. An argument can be an object such as the NSString object type, or class. NSString that includes string functionality is one example of an object class supported by NEXTSTEP and OPENSTEP. An argument can be an object that is an instance of any of the object classes supported by NEXTSTEP and OPENSTEP.

In a Windows environment, an argument can be a value of type short, long, integer, float and double, for example. In addition, the OLE/COM object model supports types such as OLE String and OLE Automation. An OLE String type is used for arguments of type string.

OLE Automation is a subset of OLE/COM that is used to dynamically invoke methods that manipulate the contents of scriptable objects. OLE Automation provides classes of objects that include automation servers, automation controllers, collection, application, document, documents, and font referred to herein as OLE Automation objects.

As indicated in the discussion above, there are some argument types that can be passed between two environments without translation. However, some argument types are unique to, or incompatible with, the argument types of another environment. Therefore, a translation mechanism is needed to allow arguments to pass between the environments.

The translation mechanism of the invention is implemented in the mediating component. Referring to Figures 3A-3C, for example, the translation mechanism is implemented in mediating component 204, 204C, and 204S. The translation can be performed in either the proxy or stub objects. If delayed stack creation is used, argument translation is optimally performed by the last intervening object (e.g., stub object 316 for server object 308 or stub object 316 for server object 306).

The translation mechanism processes each argument in a message and a response. The type that is given by the sending object and the type expected by the receiving object are compared. If the types are incompatible, a translation is performed to convert the sending type to the receiving type. The following functionality can be used to translate arguments having unique, or incompatible, types between the NEXTSTEP/OPENSTEP and Windows (or OLE) environments. It should be apparent that the translation mechanism can be adapted for use between any two environments. An example of program code that implements argument translation between the NEXTSTEP/OPENSTEP and OLE environments is provided in the section entitled "Translation Code Examples".

NEXTSTEP/OPENSTEP to OLE

The NEXTSTEP/OPENSTEP environment includes object classes such as NSString that are incompatible with a Windows object class. Numeric argument types can be passed without translation. Therefore, a translation is needed for certain argument types used in the NEXTSTEP/OPENSTEP before the arguments can be passed to the Windows environment. Figure 7A provides an example of a process flow for translating argument types from the NEXTSTEP/OPENSTEP environment to the Windows environment according to an embodiment of the invention. The process flow of Figure 7A

is performed for each argument in a client object's message or any return values contained in a server object's response.

At step 702 ("argument is in the form of an object?"), a determination is made whether the argument is an object. If it is not an object, the value is
5 passed to the object running in the NEXTSTEP/OPENSTEP environment as a value. That is, there is no need to translate the argument, and the translation processing for that argument ends at step 712.

If it is determined that the argument is in the form of an object (an affirmative determination is made at step 702), processing continues at step 706
10 to identify the object's type, or class. At step 706 ("NSString object?"), a determination is made whether the object is an NSString object. If it is determined that the object is of class NSString, processing continues at step 708 to convert the argument to an OLE string type argument, and processing ends for the current argument at step 712. If it is determined that the argument is
15 not an NSString object (at step 706), processing continues at step 710 to generate a proxy object for the object. The proxy object can be used to transmit message to and from the object argument, for example. The current argument's translation processing ends at step 712.

OLE to NEXTSTEP/OPENSTEP

20 The Windows environment includes object classes such as the OLE Automation object classes that are unique to that environment. Therefore, a translation mechanism is needed before these arguments can be passed to the NEXTSTEP/OPENSTEP environment from the Windows environment. Figure 7B provides an example of a process flow for translating argument types
25 from the Windows environment to the NEXTSTEP/OPENSTEP environment according to an embodiment of the invention. The process flow of Figure 7B is performed for each argument in a client object's message or any return values contained in a server object's response.

At step 732 ("argument is an OLE string?"), a determination is made
30 whether the current argument is an OLE string. If so, processing continues at step 734 to convert the argument to an NSString object. For example, an instance of the NSString object class is instantiated and the string value is stored in a property of the NSString object instance. Processing then ends for the current argument at step 746.

35 If it is determined (at step 732) that the argument is not an OLE string, processing continues at step 736. At step 736 ("NULL value?"), a determination is made whether the value of the argument is set to NULL. If it is, processing continues at step 738 to set the value of the argument to zero and

processing ends for the current argument at step 746. If not, processing continues at step 740 ("OLE Automation object?") to determine whether the argument is in the form of an OLE Automation object. If the argument is an OLE Automation object, processing continues at step 742 to create a proxy for the OLE Automation object. The proxy can be used to communicate with the OLE Automation object. Translation processing for the current argument ends at step 746.

If it is determined at step 740 that the argument is not an OLE Automation object, processing continues at step 744 to process a numeric argument value. At step 744, an NSNumber object is created and the numeric value is stored in a property of the object. Translation processing ends for the current argument at step 746.

Delayed Stack Creation

When an object processes a message, it retrieves the method and arguments from the message and pushes the arguments on a stack. This is referred to as unraveling the message. The object then invokes the method. In an environment where the message is sent from a client object to a server object via one or more intervening objects, it is unnecessary for each intervening object to unravel the message when the method is intended for another object and the intervening object is incapable of performing the requested operation. When the intervening object is unable to perform the requested operation after unraveling the message, it repackages the method and arguments and sends the message to the next object. This is unnecessary and inefficient. Thus, the invention optimizes processing of a message by an intervening object by delaying the method and argument retrieval and stack creation until the message is received by an object that is capable of performing the requested operation.

The invention optimizes the message transmission by eliminating the need to unravel the message at each intervening point. Referring to Figure 3A, for example, it is unnecessary for both proxy object 314 and stub object 316 to unravel the message sent from client machine 302.

The invention waits until the message is received by the last intervening object (e.g., the server object's stub object) before the message is unraveled. Thus, for example, the message is not unraveled until it is received by stub object 316 in Figure 3A. When proxy object 314 receives the message from client object 306, it passes the message to stub object 316. Proxy object 314 does not unravel the message.

Figure 9 provides an example of a delayed stack creation process flow according to an embodiment of the invention. At step 902, an object (e.g., proxy object 314) receives a message. At step 904 (i.e., "last intervening object?"), the object determines whether it is the last intervening object (e.g., stub object 316). If not, the object transmits the message to the next object at step 914 and processing for the current object ends at step 918. That is, if the object is not the last intervening object, it acts as a conduit for the message. It sends the message to the next object without unraveling the message. It does not build an argument stack or attempt to perform the operation specified by the message, for example.

If, at step 904, the object determines that it is the last intervening object, processing continues at step 906. The message is unraveled at step 906. The object retrieves the method and arguments from the message. At step 908, interface information is retrieved for the server object (e.g., server object 308). The interface information can be retrieved from an interface repository such as a COM server in MS OLE/COM, for example.

At step 910 (i.e., "argument translation needed?"), the object determines whether any argument translation is needed. If so, processing continues at step 912 to translate an argument. Processing then continues at step 910 to process any remaining arguments. If it is determined at step 910 that no argument translation is needed (or is completed), processing continues at step 916 to forward the message to the server object. At step 918, processing ends for the current message.

As illustrated in Figure 9, an intervening object acts as a conduit sending the message to the next intervening object without unraveling the message. The last intervening object unravels the message and performs any necessary argument translation. Unnecessary message processing is therefore avoided and message transmission is optimized.

Thus, a method and apparatus for dynamically brokering object messages among object models has been described.

CLAIMS

1. A method of dynamically communicating an object message between a client and server of separate object models comprising the steps of:
mapping said client to said server;
5 intercepting a message generated by said client in a first object model;
examining a second object model for interface information for said server;
generating a translated message for said server; and
forwarding said translated message to said server.
- 10 2. The method of claim 1 further comprising the step of transmitting a response from said server to said client.
3. The method of claim 1 further comprising the steps of:
said client sending a query to determine if said server is able to respond to said message; and
15 responding affirmatively to said query regardless of whether said server is able to respond to said message.
4. The method of claim 1 wherein said step of mapping further comprises the steps of:
creating a proxy object;
20 creating a stub object; and
creating an association between said proxy object and said stub object.
5. The method of claim 4 further comprising the step of creating an association between said client and said proxy object.
6. The method of claim 4 further comprising the step of creating an
25 association between said server and said stub object.
7. The method of claim 4 further comprising the step of creating an association between said server and said proxy object.
8. The method of claim 4 further comprising the step of creating an association between said client and said stub object.
- 30 9. The method of claim 1 wherein said message includes an operation and a plurality of arguments, said step of generating further comprises the steps of:
translating said operation for said server;
translating said plurality of arguments for said server; and
35 generating a translated message using a message protocol of said server.
10. The method of claim 9 wherein said step of translating said arguments further comprises the steps of:
determining the expected number and type of arguments of said server;

determining whether an expected argument type is different than an argument type; and

translating one of said plurality of arguments to an expected argument type when its type is different than said expected argument type.

5 11. The method of claim 2 wherein said step of transmitting further comprises the steps of:

determining the expected type of said response;

determining whether said type of said response is different than said expected type;

10 translating said response from said type to said expected type when said type is different than said expected type;

generating a translated response using a message protocol of said client;

and

transmitting, using said mapping, said translated response to said client.

15 12. An article of manufacture comprising:

a computer usable medium having computer readable program code embodied therein for dynamically handling an object message between a client and server in separate object models, the computer readable program code in said article of manufacture comprising:

20 computer readable program code configured to cause a computer to intercept a message generated by said client in a first object model;

computer readable program code configured to cause a computer to examine a second object model for interface information for said server;

25 computer readable program code configured to cause a computer to map said client to said server;

computer readable program code configured to cause a computer to generate a translated message for said server;

computer readable program code configured to cause a computer to forward said translated message to said server; and

30 computer readable program code configured to cause a computer to transmit a response from said server to said object.

13. The article of manufacture of claim 12 further comprising:

computer readable program code configured to cause a computer to send a query to determine if said server is able to respond to said message; and

35 computer readable program code configured to cause a computer to respond affirmatively to said query regardless of whether said server is able to respond to said message.

14. The article of manufacture of claim 12 wherein said program code configured to cause a computer to generate a map of said client to said server further comprises:

5 computer readable program code configured to cause a computer to create a proxy object;

computer readable program code configured to cause a computer to create a stub object; and

computer readable program code configured to cause a computer to create an association between said proxy object and said stub object.

10 15. The article of manufacture of claim 14 further comprising computer readable program code configured to cause a computer to create an association between said client and said proxy object.

16. The article of manufacture of claim 14 further comprising computer readable program code configured to cause a computer to create an association between said server and said stub object.

17. The article of manufacture of claim 14 further comprising computer readable program code configured to cause a computer to create an association between said server and said proxy object.

18. The article of manufacture of claim 14 further comprising computer readable program code configured to cause a computer to create an association between said client and said stub object.

19. The article of manufacture of claim 12 wherein said message includes an operation and a plurality of arguments, said program code configured to cause a computer to generate a translated message further comprises:

25 computer readable program code configured to cause a computer to translate said operation for said server;

computer readable program code configured to cause a computer to translate said plurality of arguments for said server; and

30 computer readable program code configured to cause a computer to generate a translated message using a message protocol of said server.

20. The article of manufacture of claim 19 wherein said program code configured to cause a computer to translate said arguments further comprises:

35 computer readable program code configured to cause a computer to determine the expected number and type of arguments of said server;

computer readable program code configured to cause a computer to determine whether an expected argument type is different than an argument type; and

computer readable program code configured to cause a computer to translate one of said plurality of arguments to an expected argument type when its type is different than said expected argument type.

21. The article of manufacture of claim 12 wherein said program code
5 configured to cause a computer to transmit said response further comprises the steps of:

computer readable program code configured to cause a computer to determine the expected type of said response;

10 computer readable program code configured to cause a computer to determine whether said type of said response is different than said expected type;

computer readable program code configured to cause a computer to translate said response from said type to said expected type when said type is different than said expected type;

15 computer readable program code configured to cause a computer to generate a translated response using a message protocol of said client; and

computer readable program code configured to cause a computer to transmit, using said mapping, said translated response to said client.

22. A dynamic object message broker comprising:

20 a first computer system having a first object model and a first object running in said first object model;

an mediating component coupled to said first computer system, said mediating component capable of creating a dynamic messaging interface; and

25 a second computer system coupled to said mediating component, said second computer system having a second object model and a second object running in said second object model.

23. The message broker of claim 22 wherein said mediating component comprises:

30 a control module, said control module capable of creating a mapping between said client object and said server object;

a proxy object coupled to said a control module; and

a stub object coupled to said proxy object.

24. The message broker of claim 23 wherein said first object is a client object, and said proxy object is coupled to said client object.


35 25. The message broker of claim 24 wherein said second object is a server object, and said stub object is coupled to said server object.

26. The message broker of claim 22 further comprising a second mediating component coupled to said mediating component.

27. A method of dynamically communicating an object message between a client and server in separate object models comprising the steps of:
intercepting a message generated by said client in a first object model;
examining a second object model for interface information for said
5 server;
creating a proxy object associated with said client;
creating a stub object associated with said server;
determining a message protocol for said server;
generating a translated message from said message using said message
10 protocol; and
forwarding said translated message to said server.
28. The method of claim 27 further comprising the step of creating an association between said proxy object and said stub object.
29. The method of claim 27 wherein said message includes an
15 operation and a plurality of arguments, said method further comprising the steps of:
translating said operation for said server; and
translating said plurality of arguments for said server.
30. The method of claim 27 wherein said step of translating said
20 arguments further comprises the steps of:
determining the expected number and type of arguments of said server;
determining whether an expected argument type is different than an argument type; and
translating one of said plurality of arguments to an expected argument
25 type when its type is different than said expected argument type.
31. A method of dynamically handling a message between separate object models comprising the steps of:
intercepting a message generated by a client in a first object model;
examining a plurality of second object models to locate a server to
30 process said message;
obtaining interface information for said server running in one of said plurality of second object models;
generating a translated message for said server; and
forwarding said translated message to said server.

35

1/19

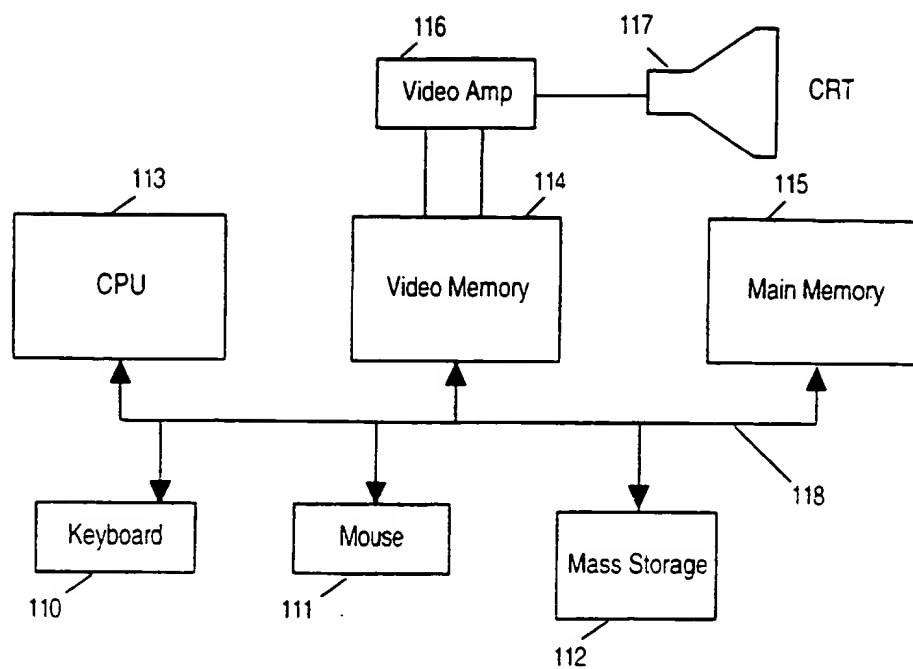*Fig. 1*

2/19

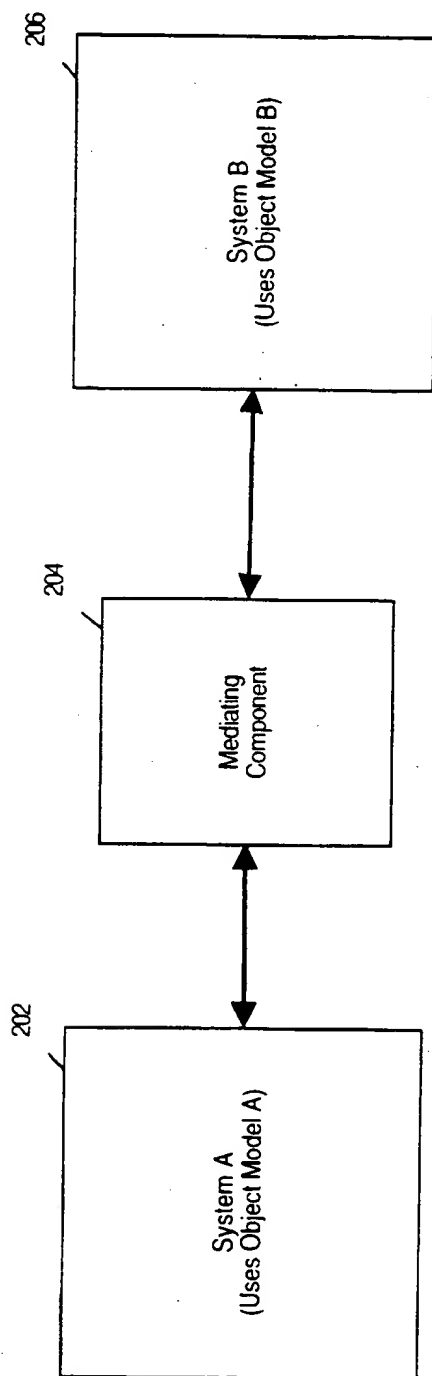


Fig. 2

3/19

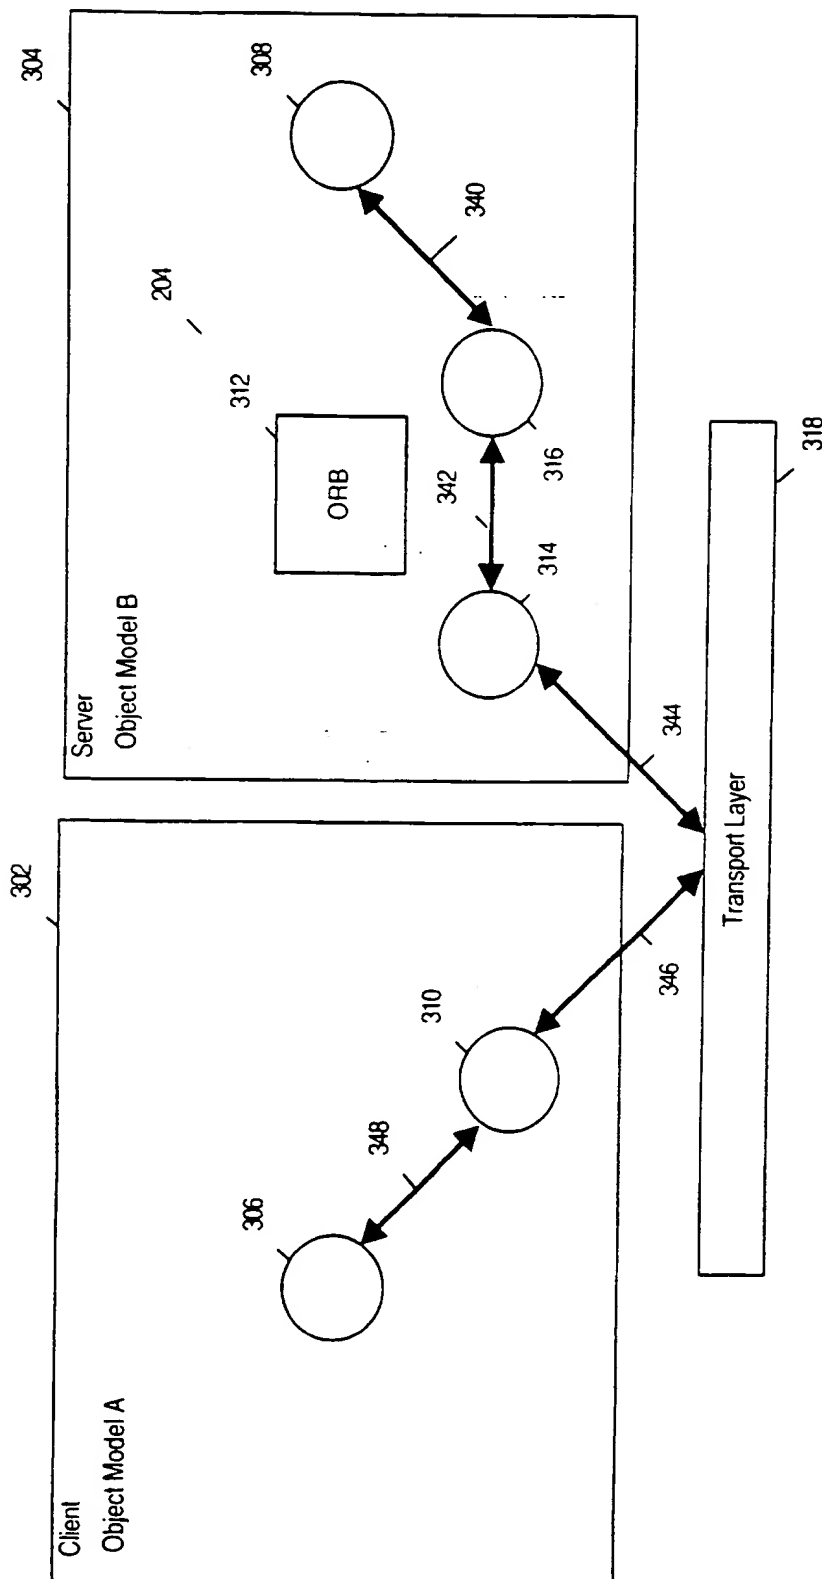


Fig. 3A

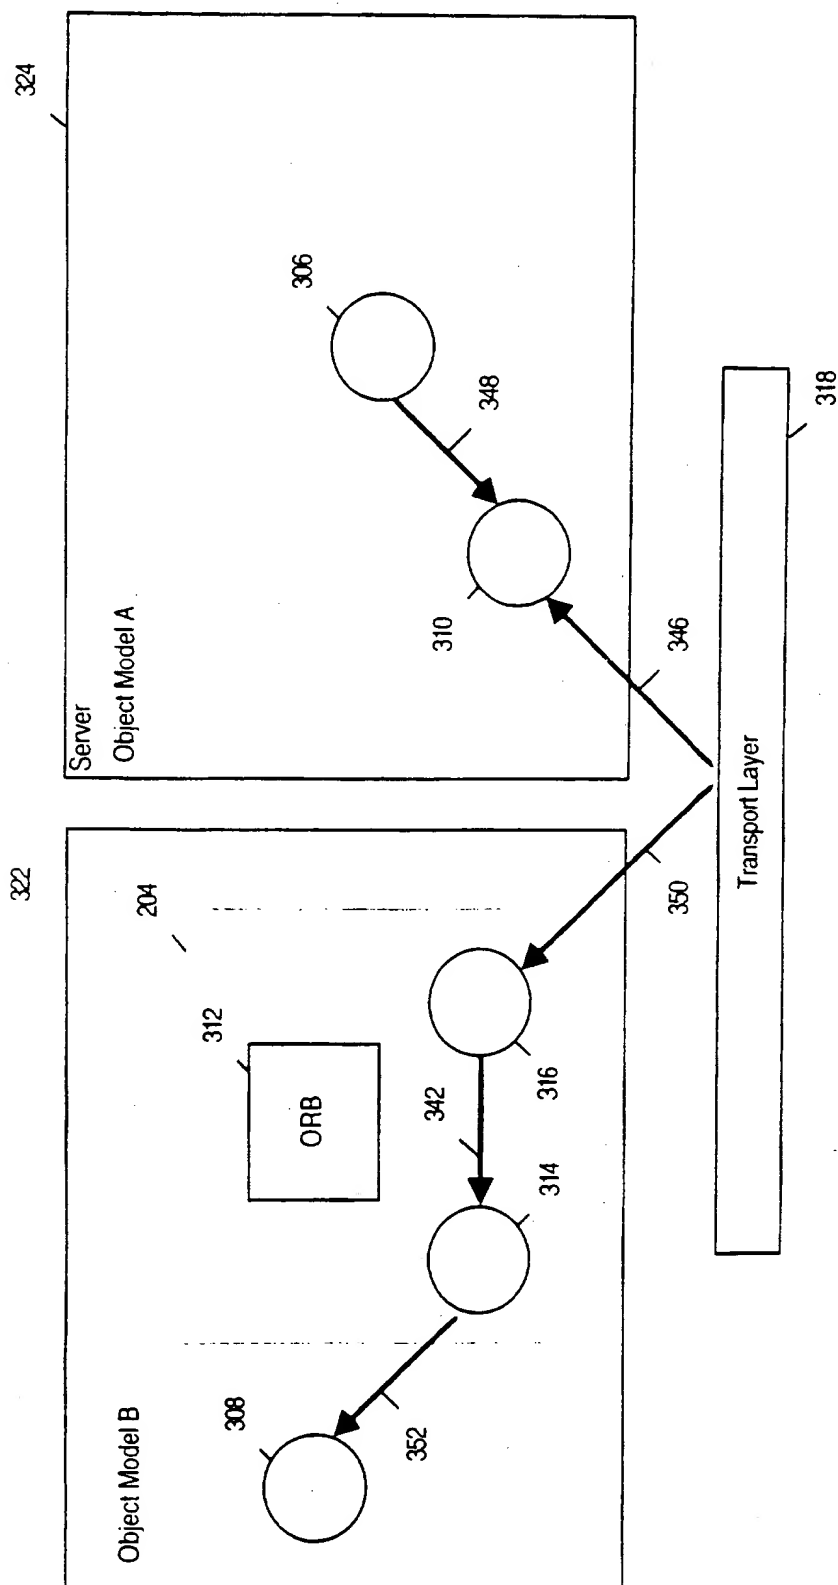


Fig. 3B

5/19

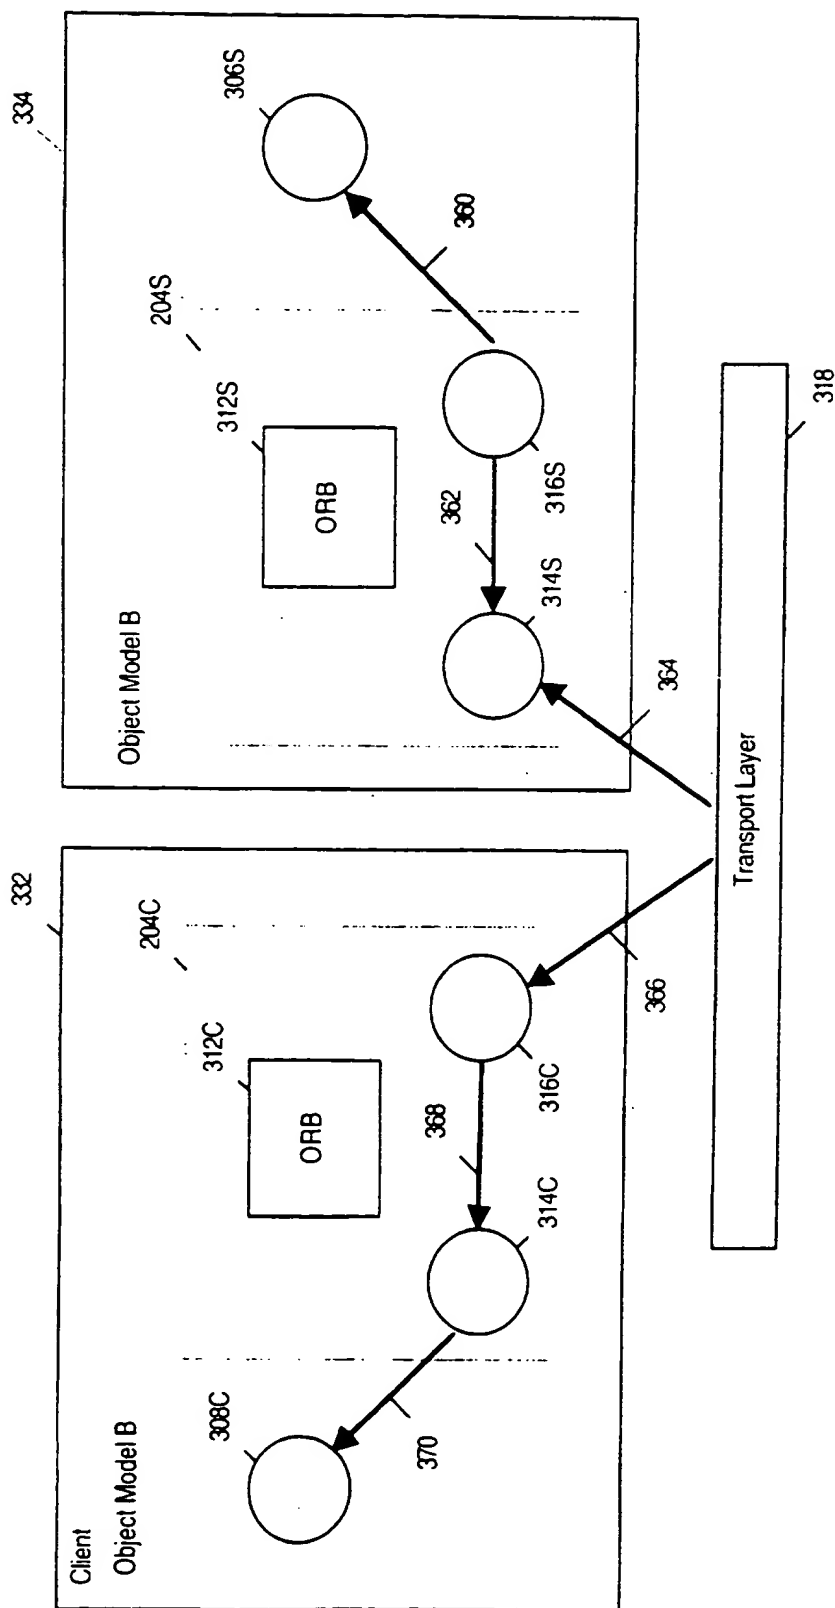


Fig. 3C

6/19

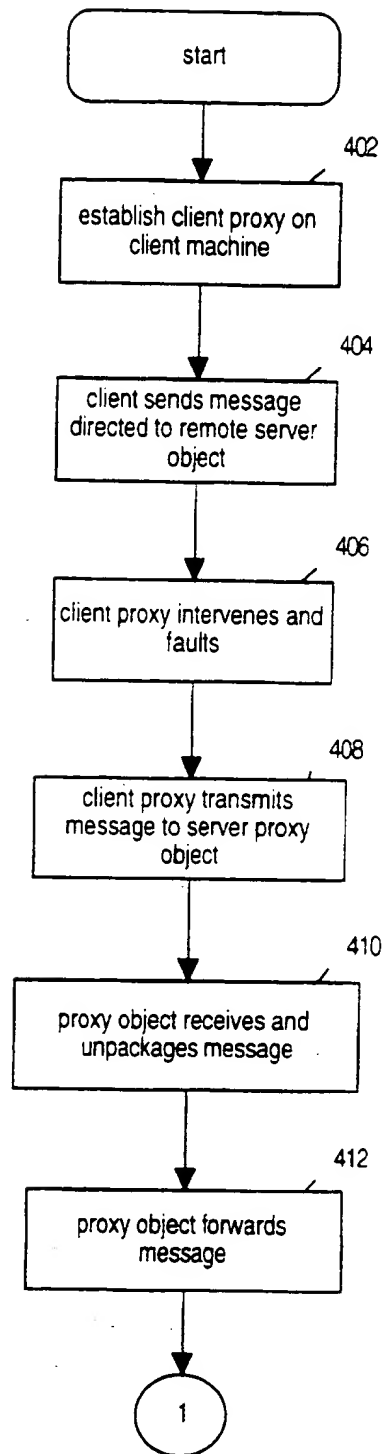
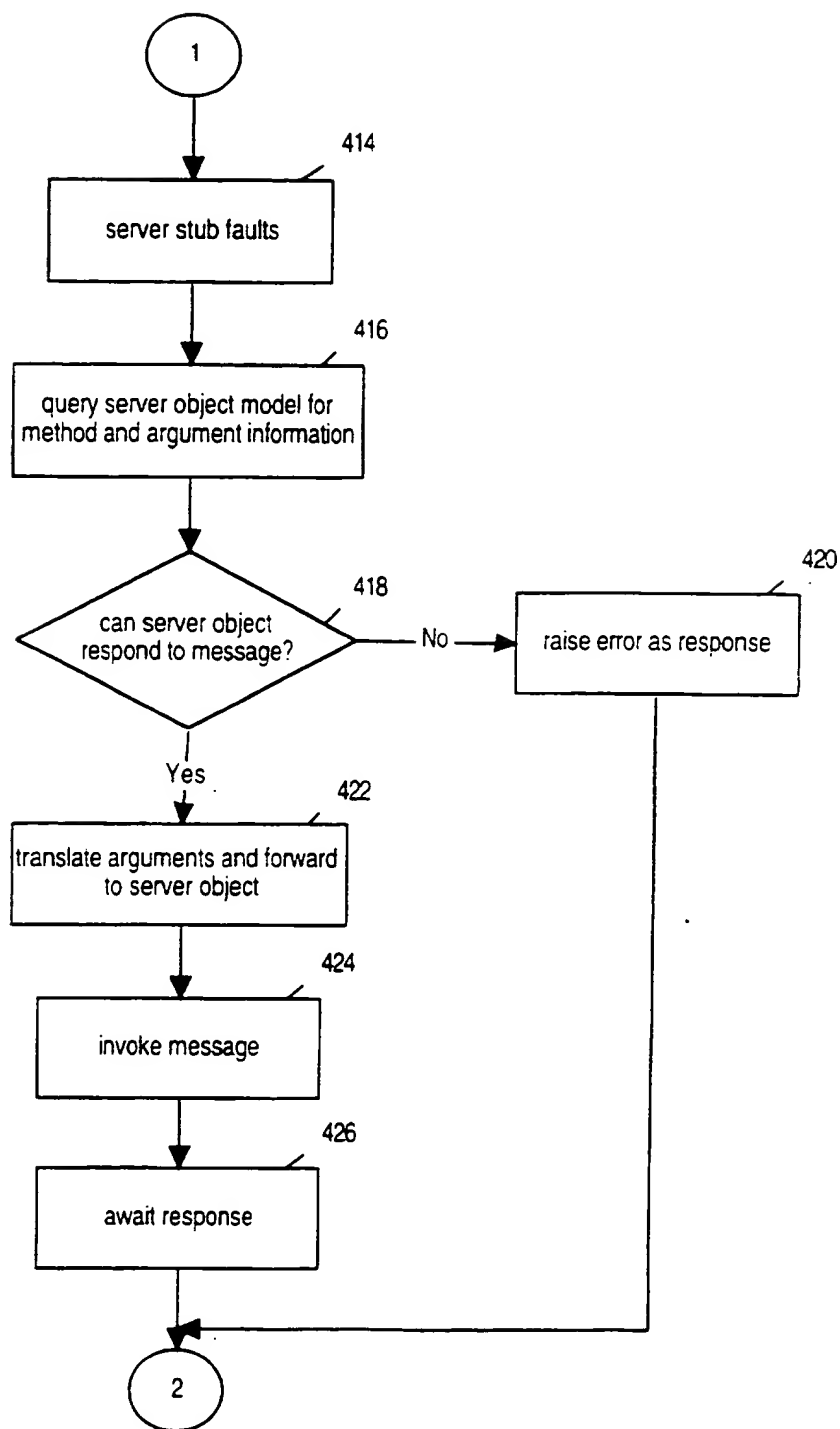
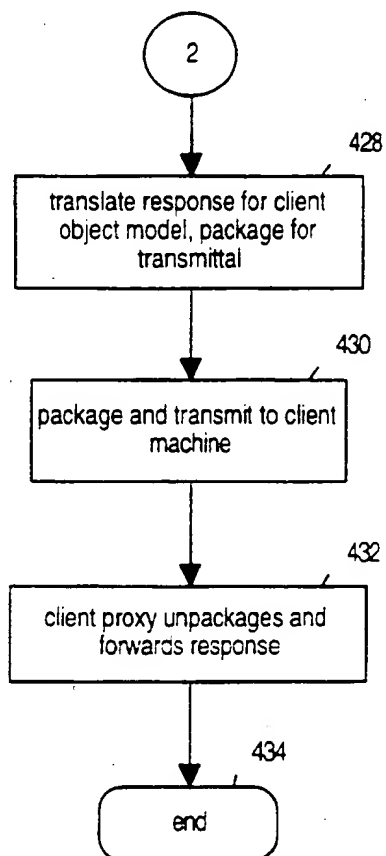


Fig. 4A

7/19

*Fig. 4B*

8/19

*Fig. 4C*

9/19

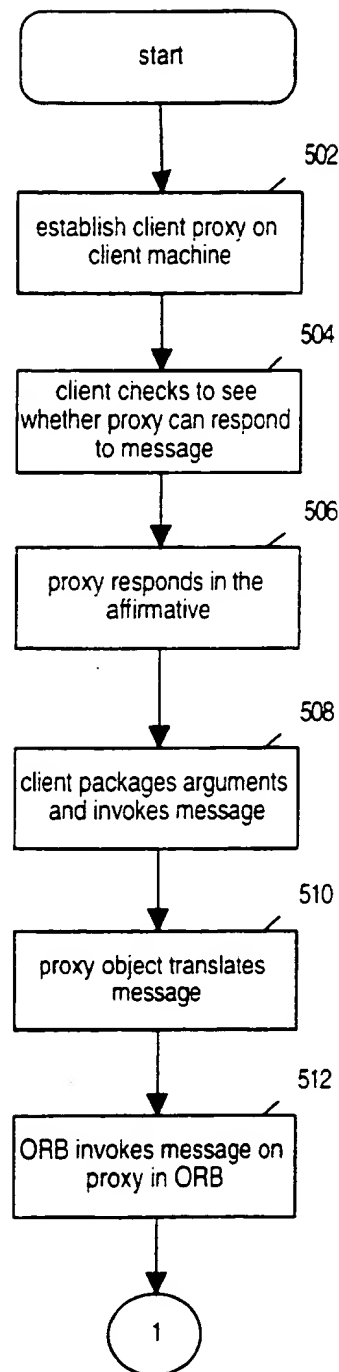
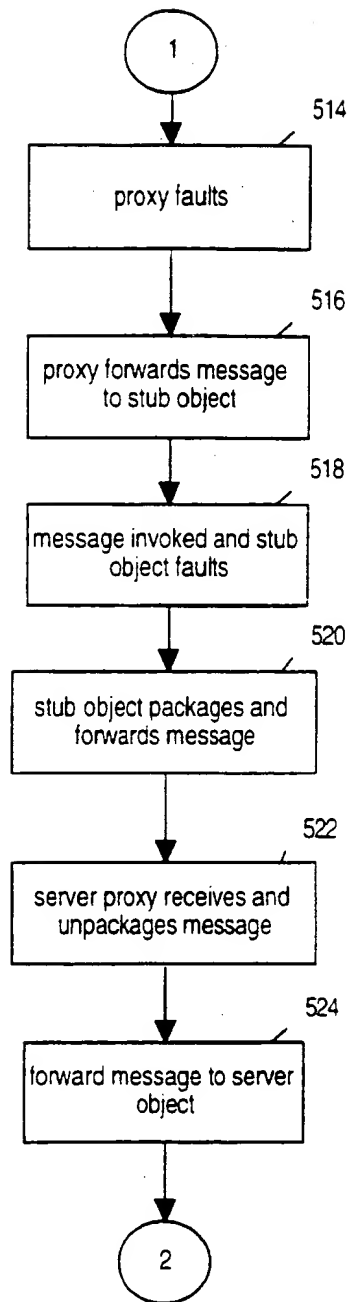
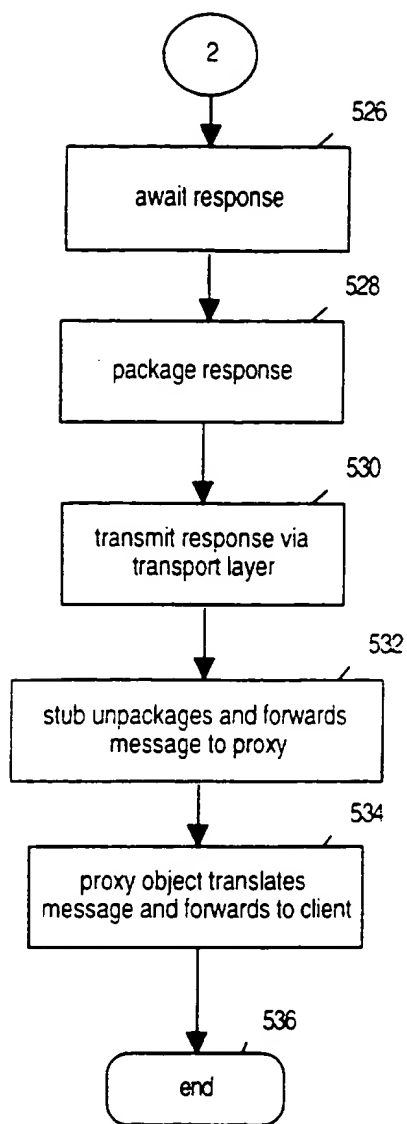


Fig. 5A

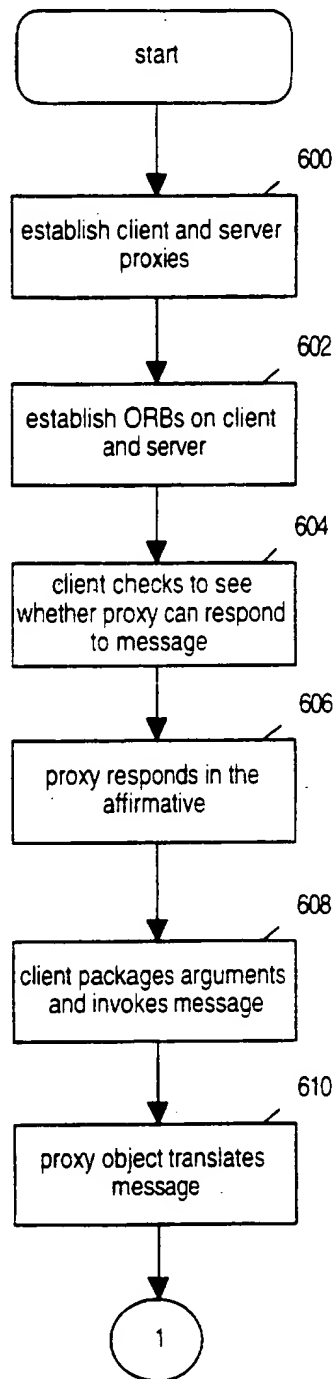
10/19

*Fig. 5B*

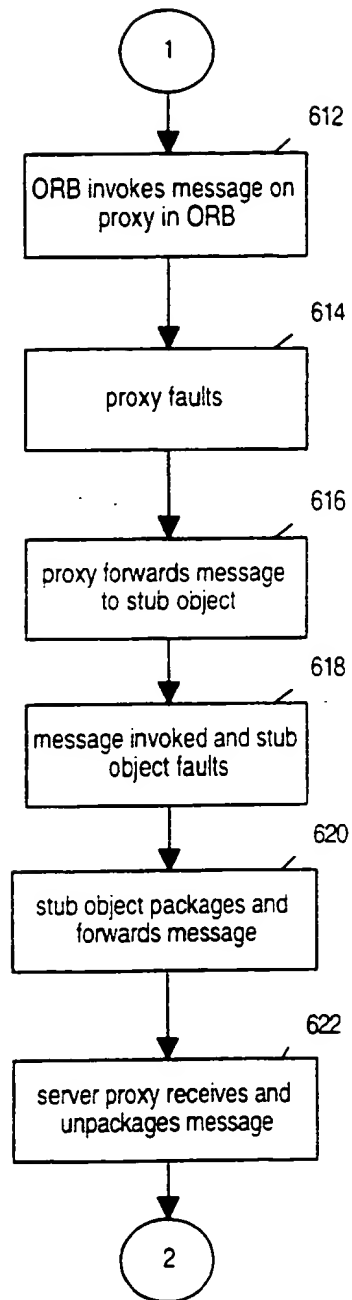
11/19

*Fig. 5C*

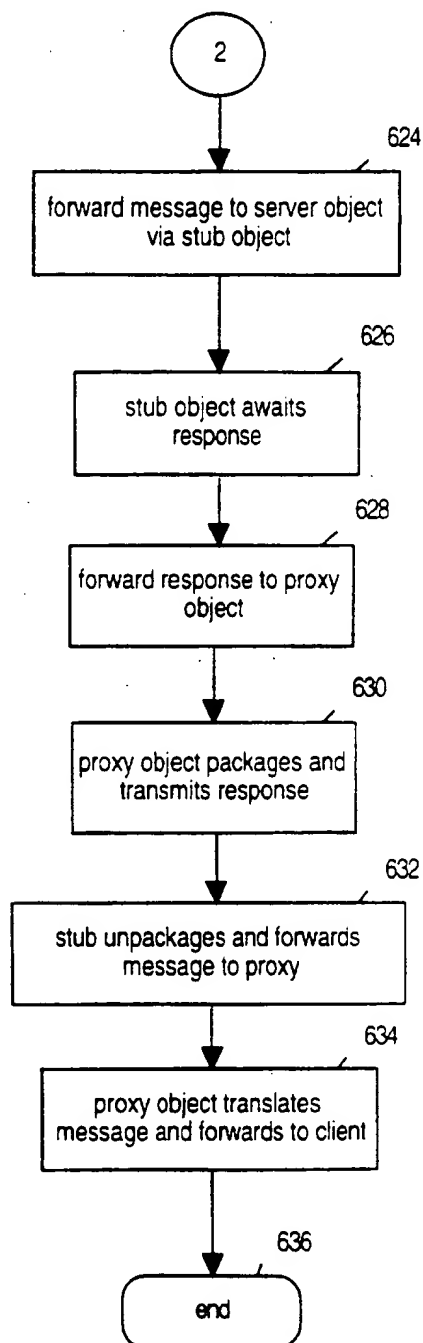
12/19

*Fig. 6A*

13/19

*Fig. 6B*

14/19

*Fig. 6C*

15/19

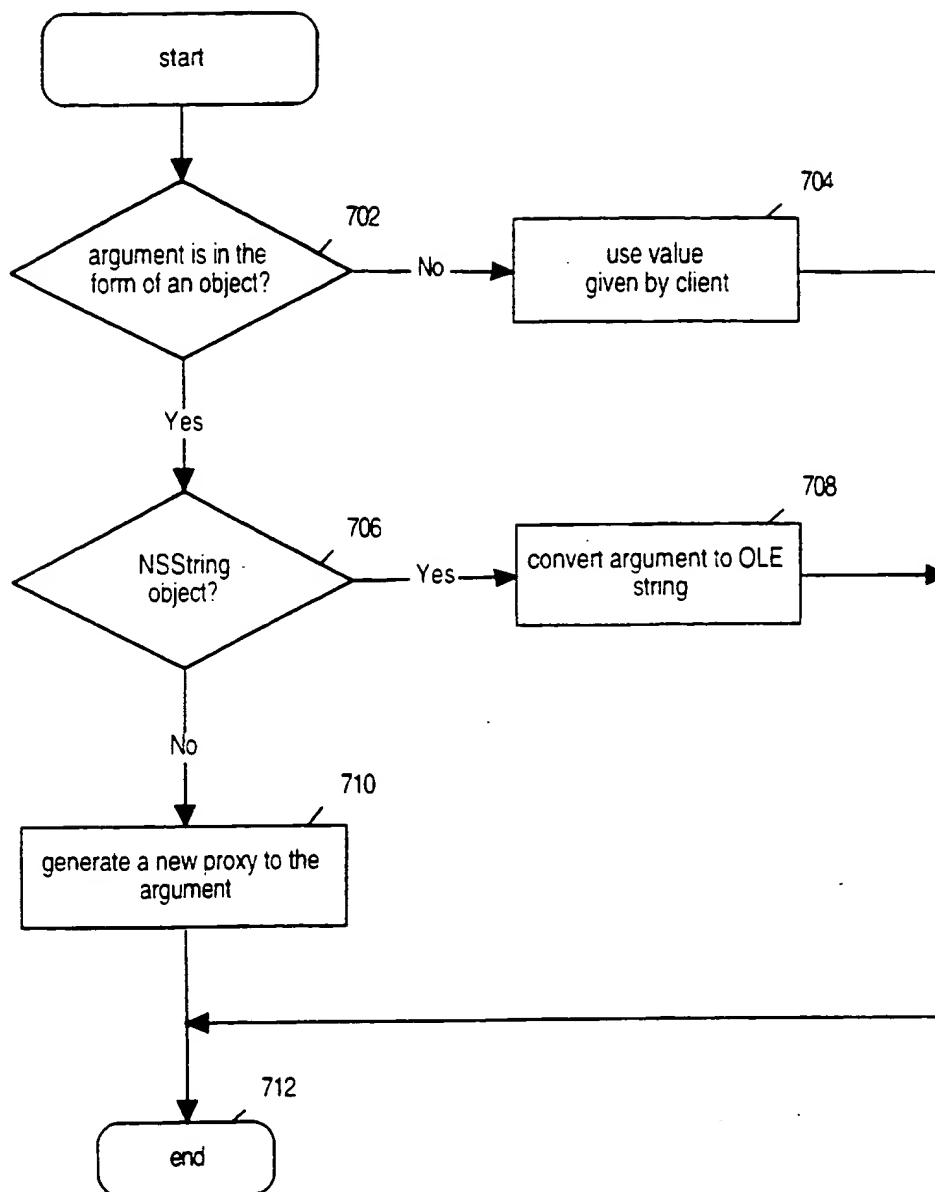


Fig. 7A

16/19

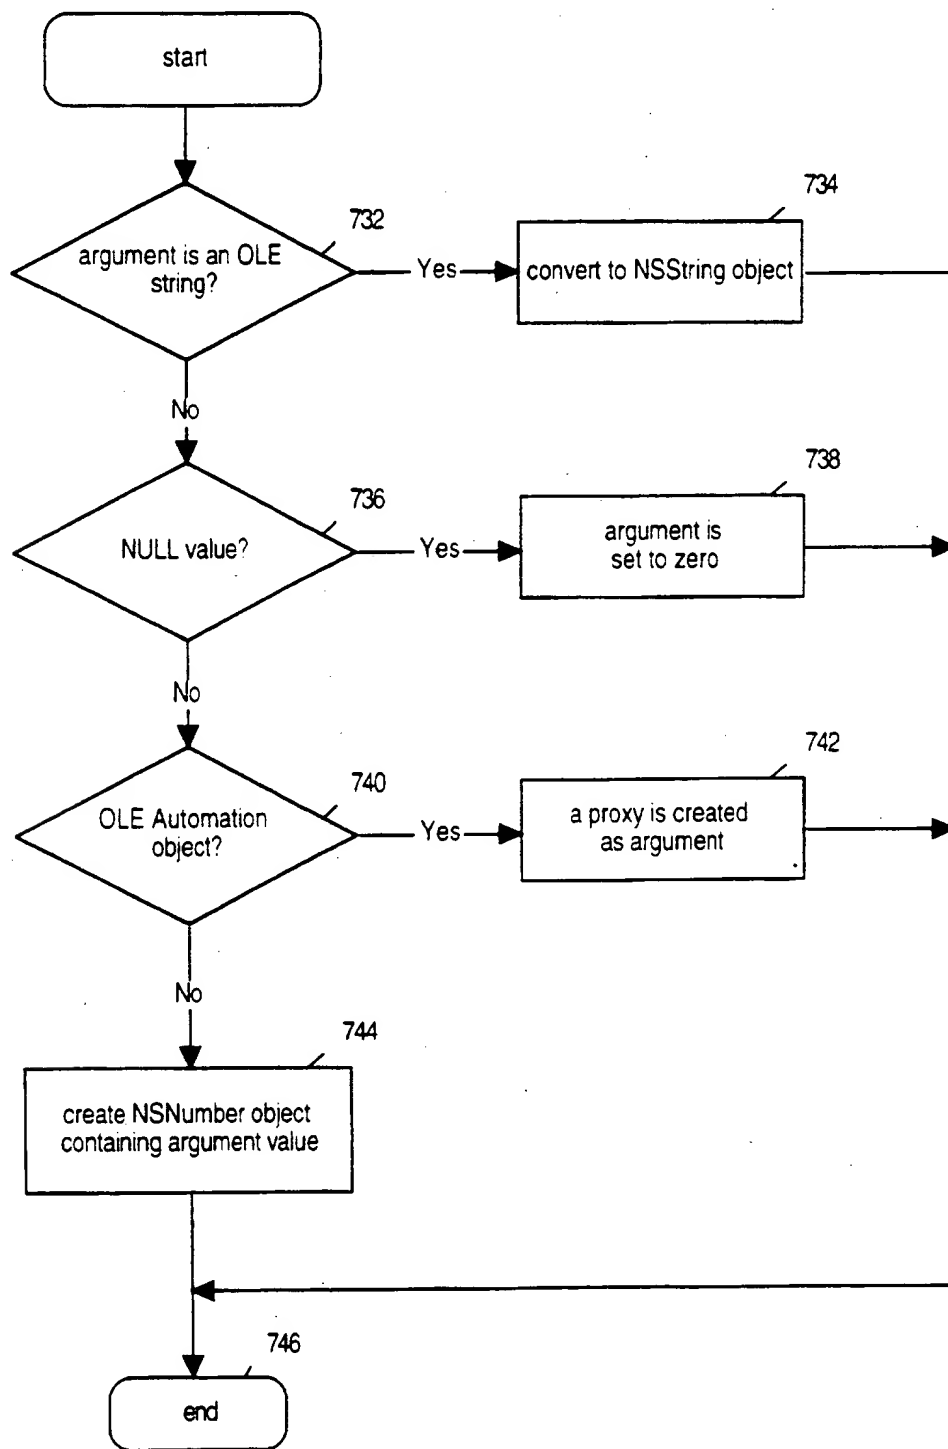


Fig. 7B

17/19

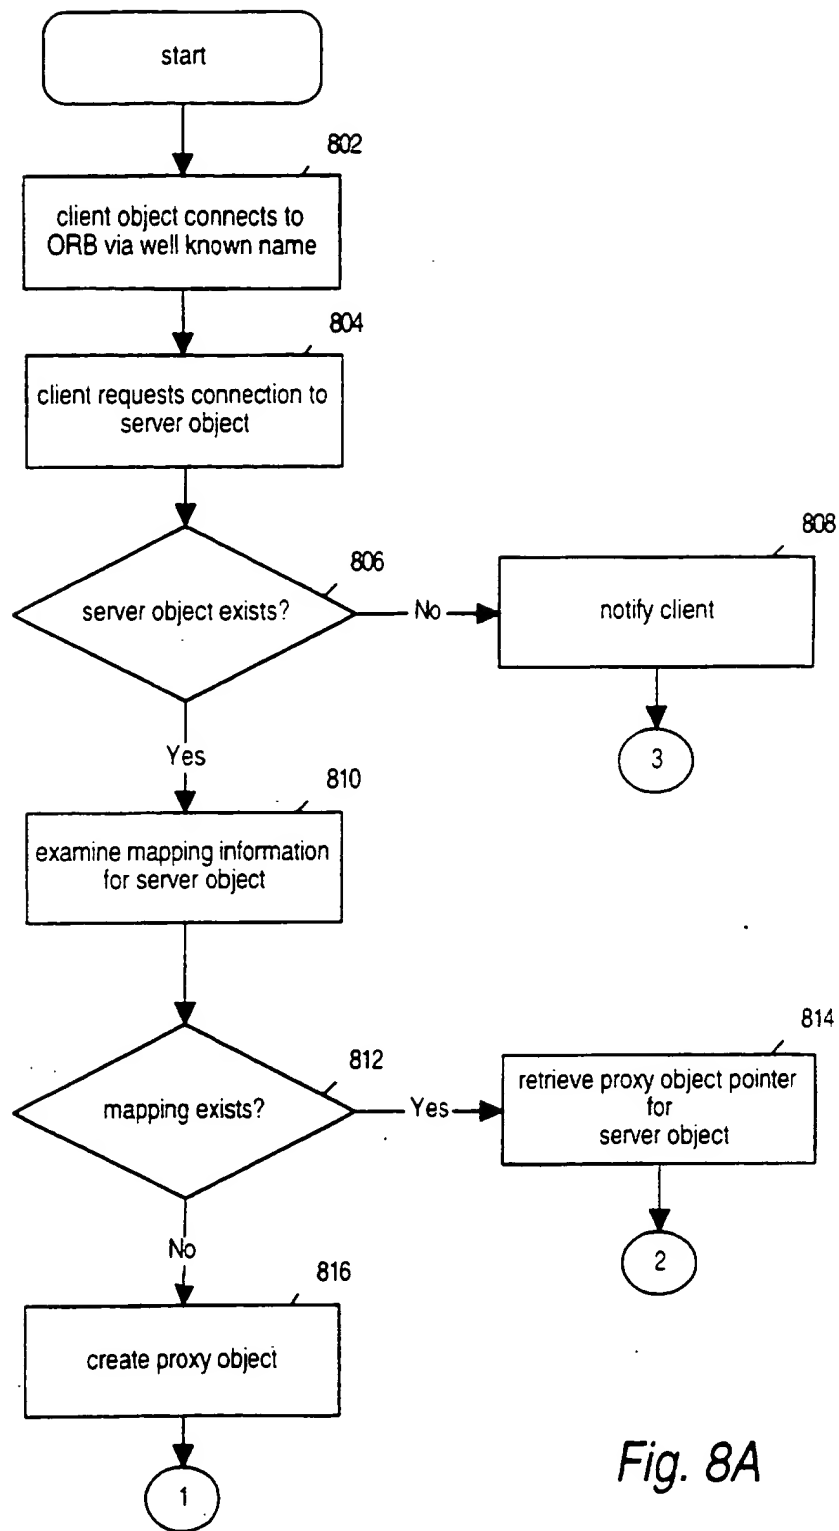
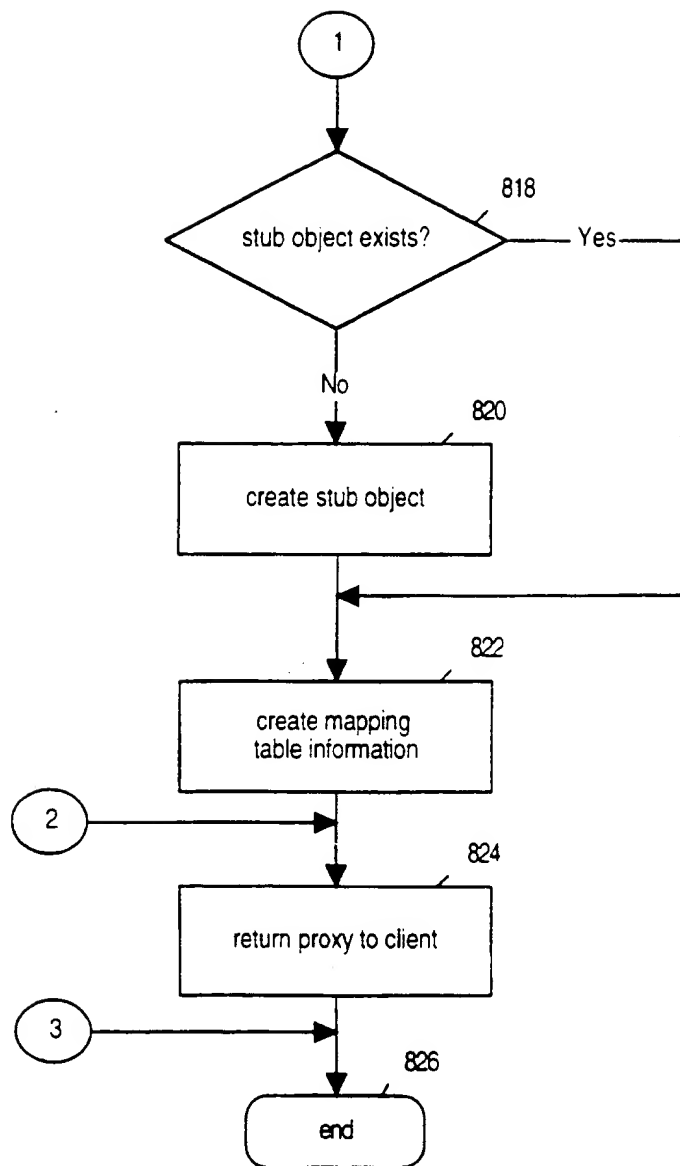
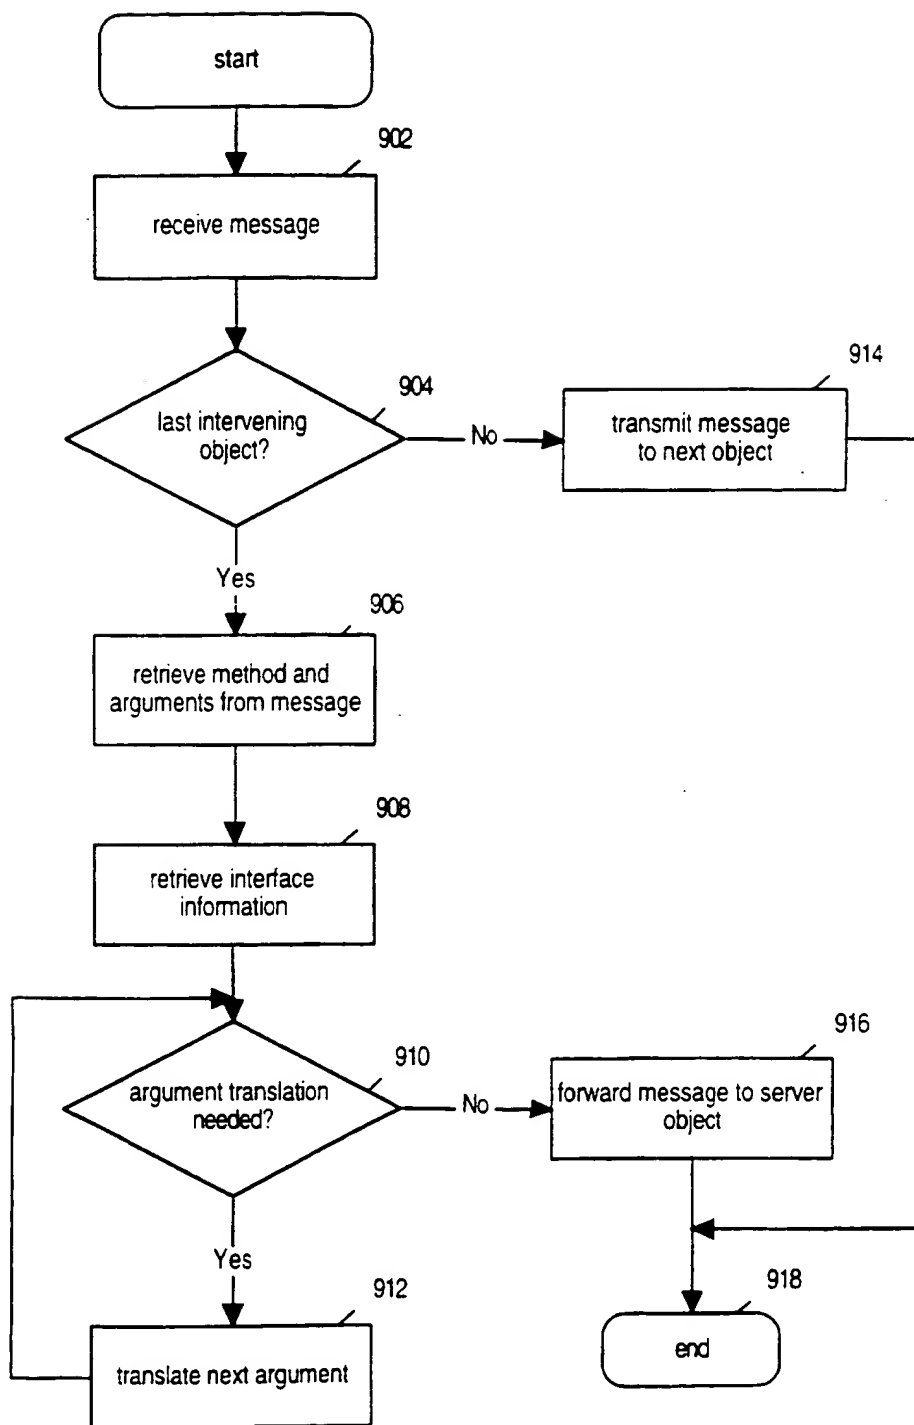


Fig. 8A

18/19

*Fig. 8B*

*Fig. 9*

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 97/12336

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 G06F9/46		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 G06F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 94 11810 A (MICROSOFT CORPORATION) 26 May 1994 see the whole document ---	1-31
A	US 5 481 721 A (B. SERLET ET AL) 2 January 1996 see the whole document ---	1-31
P,A	WO 97 15883 A (VIEWSOFT, INC.) 1 May 1997 see the whole document ---	1-31
P,A	EP 0 766 172 A (SUN MICROSYSTEMS, INC.) 2 April 1997 see the whole document -----	1-31
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </div> <div style="width: 45%;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">19 September 1997</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">09.10.97</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl. Fax (- 31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Abram, R</div>

REVISED
VERSION

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 97/12336

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G06F9/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 94 11810 A (MICROSOFT CORPORATION) 26 May 1994 see the whole document ---	1-31
A	US 5 481 721 A (B. SERLET ET AL) 2 January 1996 see the whole document ---	1-31
P,A	WO 97 15883 A (VIEWSOFT, INC.) 1 May 1997 see the whole document ---	1-31
P,A	EP 0 766 172 A (SUN MICROSYSTEMS, INC.) 2 April 1997 see the whole document -----	1-31

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

19 September 1997

Date of mailing of the international search report

09.10.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Abram, R

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No.

PCT/US 97/12336

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9411810 A	26-05-94	DE 69309485 D	07-05-97
		DE 69309485 T	10-07-97
		EP 0669020 A	30-08-95
		JP 9502547 T	11-03-97
		US 5511197 A	23-04-96

US 5481721 A	02-01-96	NONE	

WO 9715883 A	01-05-97	NONE	

EP 766172 A	02-04-97	NONE	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 97/12336

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9411810 A	26-05-94	DE 69309485 D	07-05-97
		DE 69309485 T	10-07-97
		EP 0669020 A	30-08-95
		JP 9502547 T	11-03-97
		US 5511197 A	23-04-96

US 5481721 A	02-01-96	NONE	

WO 9715883 A	01-05-97	NONE	

EP 766172 A	02-04-97	NONE	
